

## Test Report

- Translation -

Document No.: (3058/042/12) – NB dated 28.06.2012

Client: Adolf Würth GmbH & Co.KG  
Reinhold-Würth-Straße 12-17  
74653 Künzelsau

Deutschland

Order date: 28.06.2012

Order Ref.: -

Order received: 28.06.2012

Subject: "Würth Injection system WIT-VM 250 for concrete", bonded anchors placed in the non-cracked tension zone of RC floor sections, strength class  $\geq$  C20/25, and subjected to centric tension loads, to be tested and evaluated in connection with anchor rods (dimensions M8 to M30) for their reaction to fire to determine their fire resistance time

Test basis: DIN EN 1363-1 : 1999-10

Test material received: Week 46/2006

Sampling: The Testing House does not have any information indicating official sampling.

Test material marking: None

Test date: 21/11/2006, 28/11/2006, 06/12/2006, 24/01/2007 and 20/02/2007

Valid until: 06/03/2013

This Test Report consists of 8 pages, incl. cover and 11 annexes.

The Test Report No.: (3058/042/12) – NB dated 28.06.2012 does not replace a General Building Code Test Certificate (abP; abZ, ETA) according to the German Länder Building Regulations.

This Test Report may not be circulated unless as a complete text and without any alterations. Excerpts or abridged versions of the Test Report are subject to approval in writing of MPA Braunschweig. Translations of this document must bear the note "translation of the German original not examined by the Braunschweig Civil Engineering Materials Testing Institute". The first sheet of this document and the page carrying the signatures bear the official stamp of MPA Braunschweig. Documents that do not carry a signature and the official stamp are invalid. The test material has been fully used. Accreditations are valid for the testing methods specified in the current documents. A list showing fields for which accreditation has been obtained can be made available upon request.



## Contents

1	Background and general statement.....	2
2	Description of system tested .....	3
3	Test set-up and testing.....	3
4	Test results, evaluation and conclusions .....	4
4.1	Evaluation of test results respecting centric tension loading.....	4
4.2	Evaluation of test results respecting steel failure .....	4
4.2.1	General .....	4
4.2.2	Presentation of test results and evaluation .....	5
4.2.3	Proposed rating for the "Würth Injection system WIT-VM 250 for concrete" bonded anchors (dimensions M8 to M30) in connection with anchor rods made from electro-galvanized steel (strength class $\geq 5.8$ ).....	5
4.2.4	Proposed rating for the "Würth Injection system WIT-VM 250 for concrete" bonded anchors (dimensions M8 – M30) in connection with anchor rods made from stainless steel .....	6
5	Annotations .....	7
	List of annexes.....	8

## 1 Background and general statement

Under the order placed with the Testing House, a Test Report was to be drawn up on the reaction to fire of "Würth Injection system WIT-VM 250 for concrete" bonded anchors, which are subjected to centric tension and tested for steel failure in compliance with section 2.3 of TR 020 : 2004-05, when exposed to a fire in compliance with DIN EN 1363-1 : 1999-10 to determine their fire resistance time.

### Related documents:

- (1) DIN EN 1363-1 : 1999-10, Fire resistance tests - Part 1: General requirements,
- (2) EOTA Technical Report TR 020 : 2004-05 - Evaluation of anchorages in concrete concerning resistance to fire,
- (3) "Würth Injection system WIT-VM 250 for concrete", European Technical Approval ETA-12/0164 of 26-03-2012, issued by DIBt, Berlin,
- (4) is a transfer of Test Report No. (3290/0966)-NB dated 06-03-2008. The injection adhesive anchors evaluated in the present Test Report are per statement of the client identical with the anchors evaluated in the Test Report No. (3290/0966)-NB. This document is the translated version of Test Report No. (3290/0966)-NB dated 06-03-2008. The german version is the only legally binding text.

Using the results achieved in the fire test, the "Würth Injection system WIT-VM 250 for concrete" were to be examined and evaluated respecting requirements (steel failure, pullout) specified in EOTA Technical Report TR 020 : 2004-05.

## **2 Description of system tested**

The "Würth Injection system WIT-VM 250 for concrete" bonded anchor is an injection system that uses the bonding effect between anchor rod, bonding mortar and concrete to become anchored in the substrate. According to the type approval for cold design of anchoring means primarily subjected to static loads, the "Würth Injection system WIT-VM 250 for concrete" bonded anchor may be used in reinforced and non-reinforced normal-weight concrete (strength class C20/25 as a minimum and C50/60 as a maximum) in the non-cracked concrete.

Main elements of the tested "Würth Injection system WIT-VM 250 for concrete" bonded anchor are a two-component mortar cartridge (injection mortar: styrene-free vinylester resin system with cement, water and sand) and cold-formed anchor rods (dimensions M8 to M30), together with a hexagon nut and a washer. The anchor rods and the nuts and washers are made from electro-galvanized steel (strength class  $\geq 5.8$ ) and from stainless steel (material No. 1.4401 (A4) and 1.4571 (A5), 1.4529 (HCR), strength class 70). Forces are transmitted by the bond stress between the anchor rod and the anchoring substrate. For the service conditions, the "Würth Injection system WIT-VM 250 for concrete" bonded anchor is regulated by the above-named approval.

As specified in the above type approval, the "Würth Injection system WIT-VM 250 for concrete" bonded anchors were installed with the installation tools (hammer drill and drill, cleaning device and injection device) defined in these documents.

Further structural details and details of the as-installed condition of the bonded anchors are shown annexes 1.1 to 1.4 of this Test Report.

## **3 Test set-up and testing**

The "Würth Injection system WIT-VM 250 for concrete" bonded anchors were fire tested in a small-sized furnace with the inside dimensions 1,000 mm x 1,500 mm x 1,500 mm (W x D x H). RC slabs (strength class C20/25) formed the horizontal barrier, into the tension zones of which the "Würth Injection system WIT-VM 250 for concrete" bonded anchors were placed.

In compliance with TR 020 : 2004-05, section 2.3.1, external loading systems and protected steel elements (dead loads) of the required weight, which were suspended for an unsupported and unprotected length of  $l \leq 500$  mm with tension rods and an additional steel adapter, were used for

introducing the centric loads into the "Würth Injection system WIT-VM 250 for concrete" bonded anchors.

The furnace was exposed to a fire in compliance with the standard temperature-time curve (ETK) as specified in DIN EN 1363-1 : 1999-10, section 5.1.1. The temperatures in the furnace were measured with 2 plate thermometers with measuring heads made from Ni-Cr/Ni-Al wire (type K) dia. 1.0 mm in compliance with DIN EN 1363-1 : 1999-10, section 4.5.1.1.

The temperatures measured in the furnace during the fire tests are illustrated by the graphs in annexes 2.1, 3.1, 4.1, 5.1 and 6.1.

## 4 Test results, evaluation and conclusions

### 4.1 Evaluation of test results respecting centric tension loading

On 21/11/2006, 28/11/2006, 06/12/2006, 24/01/2007 and 20/02/2007, a total of 23 "Würth Injection system WIT-VM 250 for concrete" bonded anchors were placed in the non-cracked tension zone of RC floor sections (strength class C20/25) and tested for their reaction to fire when subjected to centric tension loads in compliance with DIN EN 1363-1 : 1999-10 to determine their fire resistance time.

Tables 4-1 to 4-5 in Test Report No. (3290/0966)-NB dated 06-03-2008 list the test results for the 23 "Würth Injection system WIT-VM 250 for concrete" bonded anchors in connection with anchor rods made from electro-galvanized steel and stainless steel and make reference to the cause of failures.

### 4.2 Evaluation of test results respecting steel failure

#### 4.2.1 General

The basis used for evaluation was section 2.3.1 of EOTA Technical Report TR 020 : 2004-05:

$$\sigma_{s1} = c_1 + c_2 / t_u \quad \text{equation: regression curve}$$

$$\sigma_{s2} = c_3 (c_1 + c_2 / t_u) \quad \text{equation: design curve}$$

Equations for determination of the characteristic steel stress for fire resistance times of 60 min., 90 min. and 120 min.:

$$\sigma_{Rk,s,f(60)} = c_3 (c_1 + c_2 / 60 \text{ min})$$

$$\sigma_{Rk,s,f(90)} = c_3 (c_1 + c_2 / 90 \text{ min})$$

$$\sigma_{Rk,s,fi(120)} = c_3 (c_1 + c_2 / 120 \text{ min})$$

Equation for determination of the characteristic steel stress for fire resistance times of 30 min., using the equation of the straight line through points  $t_u = 60 \text{ min} / \sigma_{Rk,s,fi(60)}$  and  $t_u = 90 \text{ min} / \sigma_{Rk,s,fi(90)}$ :

$$\sigma_{Rk,s,fi(30)} = c_4 - c_5 \times 30 \text{ min}$$

To calculate the tensile stress, the stress cross section  $A_s$  of the corresponding diameter of the "Würth Injection system WIT-VM 250 for concrete" bonded anchors was entered in the computation.

#### **4.2.2 Presentation of test results and evaluation**

The graphs in annex 7.1 show the test results as a function of the stress sigma s of the "Würth Injection system WIT-VM 250 for concrete" bonded anchors made from electro-galvanized steel and stainless steel A4 (diameter M8 to M16) when subjected to centric tensile loads.

The "Würth Injection system WIT-VM 250 for concrete" bonded anchors with the dimensions M24 to M30 are evaluated on the basis of the steel stress utilization level in relation to the stress cross section.

#### **4.2.3 Proposed rating for the "Würth Injection system WIT-VM 250 for concrete" bonded anchors (dimensions M8 to M30) in connection with anchor rods made from electro-galvanized steel (strength class $\geq 5.8$ )**

Using the results achieved in the tests as a basis, fire resistance periods are proposed for the "Würth Injection system WIT-VM 250 for concrete" bonded anchors (dimensions M8 to M30) made from electro-galvanized steel as shown in table 4-1 below as a function of the maximum centric tensile load.

Based on the results achieved in the tests, and departing from the evaluation specifications in TR 020 : 2004-05, the ratings for "Würth Injection system WIT-VM 250 for concrete" bonded anchors made from electro-galvanized steel have been increased with regard to the 30-minute fire resistance time.

Table 4-1: Proposed rating for “Würth Injection system WIT-VM 250 for concrete” bonded anchors (dimensions M8 – M30) made from electro-galvanized steel and stainless steel, regarding their fire resistance times as a function of stress  $\sigma_s$  when exposed to centric tensile loads

Designation Fire resistance time $t_u$ [min]	“Würth Injection system WIT-VM 250 for concrete” bonded anchor						
	Maximum tensile load <sup>1)</sup>						
	M8	M10	M12	M16	M20	M24	M30
Minimum set depth [mm]	80	90	110	125	175	210	280
30	1.64	2.60	3.35	6.25	9.75	14.04	18.26
60	1.12	1.77	2.59	4.82	7.52	10.84	14.10
90	0.59	0.94	1.82	3.40	5.30	7.64	9.94
120	0.33	0.52	1.44	2.69	4.19	6.04	7.86

<sup>1)</sup> Loads resulting from European Technical Approval ETA-12/0164 of 26-03-2012 may be decisive for the service condition.

#### 4.2.4 Proposed rating for the “Würth Injection system WIT-VM 250 for concrete” bonded anchors (dimensions M8 – M30) in connection with anchor rods made from stainless steel

Starting from the results achieved in the tests, the same characteristic tensile stresses (cf. table 4-1) are recommended for the “Würth Injection system WIT-VM 250 for concrete” bonded anchors, when adequate anchor rods made from stainless steel (material No. 1.4401 (A4) or 1.4571 (A5), 1.4529 (HCR), strength class 70) and nuts made from stainless steel (A4, strength class A-70) are used.

## 5 Annotations

- 5.1 This Test Report does not replace the attestation (General Building Code Test Certificate - abP; National Technical Approval - abZ, ETA) required under the German building code procedure. It should, in particular, be noted that the fire load density values of "Würth Injection system WIT-VM 250 for concrete" bonded anchors can in the future be regulated by European Technical Approvals.
- 5.2 The above evaluation shall only apply to the tested "Würth Injection system WIT-VM 250 for concrete", bonded anchors due consideration being given to the boundary conditions shown in the technical annexes attached to this Test Report and/or the technical data sheets of Würth GmbH & Co.KG
- 5.3 The "Würth Injection system WIT-VM 250 for concrete" bonded anchors may be used for anchoring applications in non-cracked reinforced concrete (strength class C20/25 as a minimum and C50/60 as a maximum) when primarily subjected to static loads.
- 5.4 The evaluation shall only apply in connection with members made from reinforced concrete, which can as a minimum be classified under the same fire resistance class as that of the anchors.
- 5.5 The validity of the Test Report will expire on 06/03/2013.

This document is the translated version of Test Report No. (3290/0966)-NB dated 06-03-2008. The legally binding text is the aforementioned German Test Report.

*Rohling*  
ORR Dr.-Ing. Rohling  
Head of Testing Laboratory




by order *Bollmohr*  
Dipl.-Ing. Bollmohr  
Engineer in charge

## List of annexes


- Annex 1.1: Structural design of the test installation
- Annex 1.2: "Würth Injection system WIT-VM 250 for concrete" bonded anchors after installation
- Annex 1.3: Technical details of "Würth Injection system WIT-VM 250 for concrete"
- Annex 1.4: Technical details of "Würth Injection system WIT-VM 250 for concrete"
- Annex 1.5: Technical details of "Würth Injection system WIT-VM 250 for concrete"
- Annex 2.1: Furnace temperatures – test 1
- Annex 3.1: Furnace temperatures – test 2
- Annex 4.1: Furnace temperatures – test 3
- Annex 5.1: Furnace temperatures – test 4
- Annex 6.1: Furnace temperatures – test 5
- Annex 7.1: Evaluation of test results - "Würth Injection system WIT-VM 250 for concrete"

# Furnace: chamber 6

Schnitt A-A

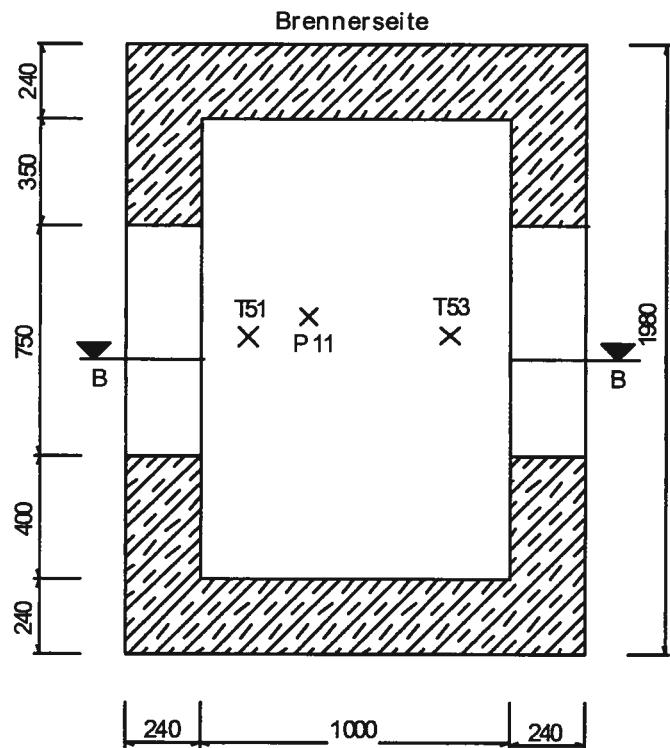

Schnitt B-B Deckenelement

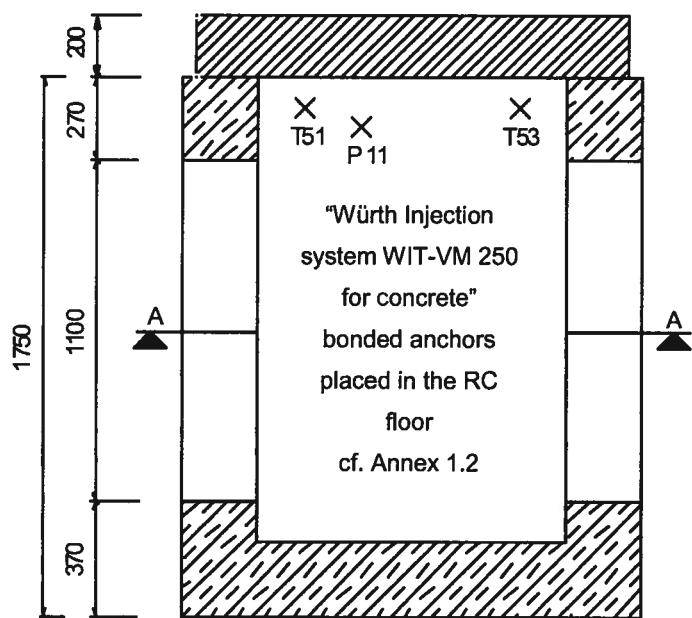

Dimensions in mm

T51 and T53 measuring points of furnace temperature, thermocouples with measuring points made of Ni-Cr/Ni-Al-wires (type K)


P11 Pressure measuring head

**Structural design of specimen**  
Illustration of test chamber

**Materialprüfanstalt für das Bauwesen**  
Institut für Baustoffe, Massivbau und Brandschutz  
der Technischen Universität Braunschweig

Annex 1.1 of  
Test Report  
No.: 3058/042/12

"Würth Injection system WIT-VM 250 for concrete" bonded anchors placed in  
RC slab /  $d \geq 200\text{mm} / 20/\text{C25}$

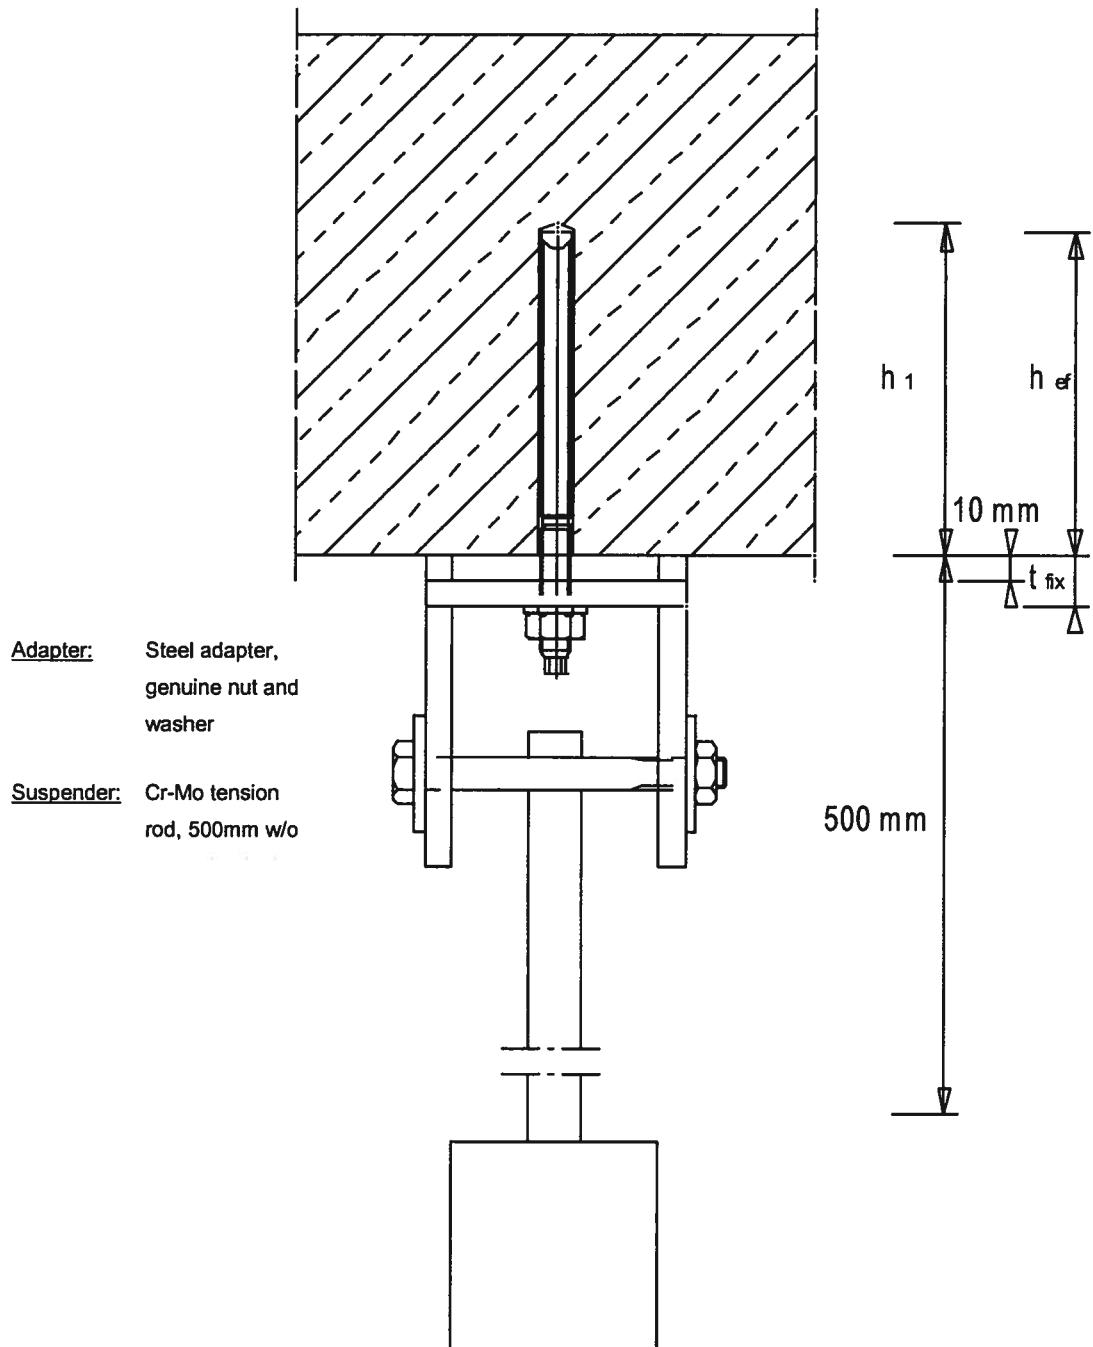

**Placed "Würth Injection system WIT-VM 250 for concrete"  
bonded anchors**  
(in accordance with TR 020 : 2004-05)

Annex 1.2 of  
Test Report

No.: 3058/042/12


**Materialprüfanstalt für das Bauwesen**  
Institut für Baustoffe, Massivbau und Brandschutz  
der Technischen Universität Braunschweig

# "Würth Injection system WIT-VM 250 for concrete" bonded anchors


## Kartusche: WIT-VM 250

150 ml, 280 ml, 300 ml, 330 ml, 380 ml, 410 ml und 420 ml Kartusche (Typ: koaxial)

### Verschluss/Drehverschluss


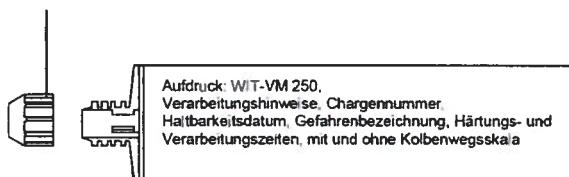


Komponente B: Härter  
(Innen-Rohr)




Komponente A: Mörtel  
(Außen-Rohr)

235 ml, 345 ml und 825 ml Kartusche (Typ: "side-by-side")

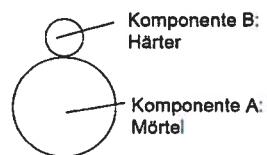

165 ml, 300 ml Kartusche (Typ: Folienkartusche)

### Verschluss/Drehverschluss

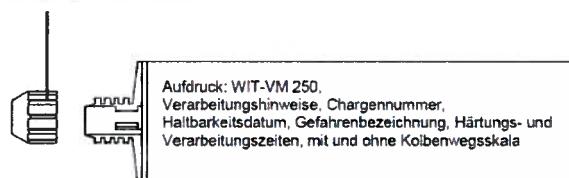

Komponente B: Härter  
und Komponente A: Mörtel  
in einem Folengebinde



### Statikmischer




### Nutzungskategorie:

- Einbau in trockenem, feuchtem Beton (alle Größen) oder wassergefülltem Bohrloch (nur M8 bis M16 und BSt Ø8 bis Ø16)
- Überkopfmontage

### Temperaturbereich:

- 40°C bis +40°C (max. Kurzzeit-Temperatur +40°C und max. Langzeit-Temperatur +24°C)
- 40°C bis +80°C (max. Kurzzeit-Temperatur +80°C und max. Langzeit-Temperatur +50°C)

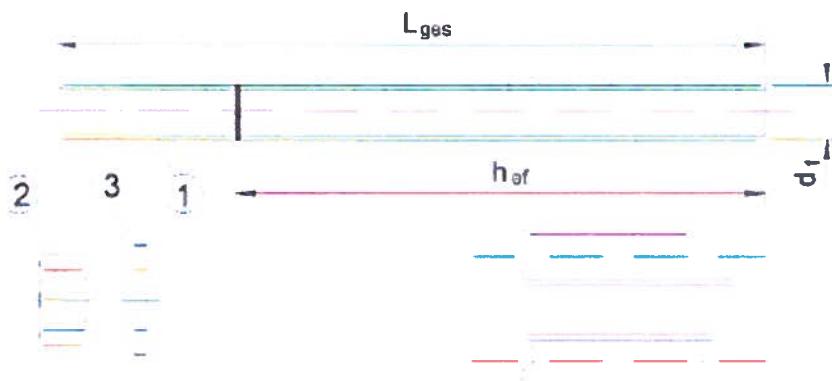

## Technical data

"Würth Injection system WIT-VM 250 for concrete"

**Materialprüfanstalt für das Bauwesen**  
Institut für Baustoffe, Massivbau und Brandschutz  
der Technischen Universität Braunschweig

Annex 1.3 of  
Test Report  
No.: 3058/042/12

# "Würth Injection system WIT-VM 250 for concrete"

Teil	Benennung	Material
<b>Stahlteile, galvanisch verzinkt <math>\geq 5 \mu\text{m}</math> gem. EN ISO 4042, feuerverzinkt <math>\geq 40 \mu\text{m}</math> gem. EN ISO 1461 und EN ISO 10684</b>		
1	Ankerstange	Stahl gemäß EN 10087 oder EN 10263 Festigkeitsklasse 5.8, 8.8 gemäß EN ISO 898-1:1999
2	Sechskantmutter EN ISO 4032	Festigkeitsklasse 5 (für Ankerstangen der Klasse 5.8) EN 20898-2, Festigkeitsklasse 8 (für Ankerstangen der Klasse 8.8) EN 20898-2
3	Unterlegscheibe EN ISO 887, EN ISO 7089, EN ISO 7093 oder EN ISO 7094	Stahl, galvanisch verzinkt oder feuerverzinkt
<b>Stahlteile aus nichtrostendem Stahl</b>		
1	Ankerstange	Werkstoff 1.4401 / 1.4404 / 1.4571, EN 10088-1:2005, > M24: Festigkeitsklasse 50 EN ISO 3506 $\leq$ M24: Festigkeitsklasse 70 EN ISO 3506
2	Sechskantmutter, EN ISO 4032	Werkstoff 1.4401 / 1.4404 / 1.4571 EN 10088, > M24: Festigkeitsklasse 50 EN ISO 3506 $\leq$ M24: Festigkeitsklasse 70 EN ISO 3506
3	Unterlegscheibe EN ISO 887, EN ISO 7089, EN ISO 7093 oder EN ISO 7094	Werkstoff 1.4401, 1.4404 oder 1.4571, EN 10088
<b>Stahlteile aus hochkorrosionsbeständigem Stahl</b>		
1	Ankerstange	Werkstoff 1.4529 / 1.4565, EN 10088-1:2005, > M24: Festigkeitsklasse 50 EN ISO 3506 $\leq$ M24: Festigkeitsklasse 70 EN ISO 3506
2	Sechskantmutter, EN ISO 4032	Werkstoff 1.4529 / 1.4565 EN 10088, > M24: Festigkeitsklasse 50 EN ISO 3506 $\leq$ M24: Festigkeitsklasse 70 EN ISO 3506
3	Unterlegscheibe EN ISO 887, EN ISO 7089, EN ISO 7093 oder EN ISO 7094	Werkstoff 1.4529 / 1.4565 gemäß EN 10088

Handelsübliche Gewindestange mit:

- Werkstoff, Abmessungen und mechanische Eigenschaften gemäß Tabelle 1a
- Abnahmeprüfzeugnis 3.1 gemäß EN 10204:2004
- Markierung der Setztiefe

## Technical data

**"Würth Injection system WIT-VM 250 for concrete"**

**Materialprüfanstalt für das Bauwesen**  
Institut für Baustoffe, Massivbau und Brandschutz  
der Technischen Universität Braunschweig

Annex 1.4 of  
Test Report  
No.: 3058/042/12

# "Würth Injection system WIT-VM 250 for concrete"

**Threaded rod M8, M10, M12, M16, M20, M24, M27, M30  
with washer and hexagon nut**

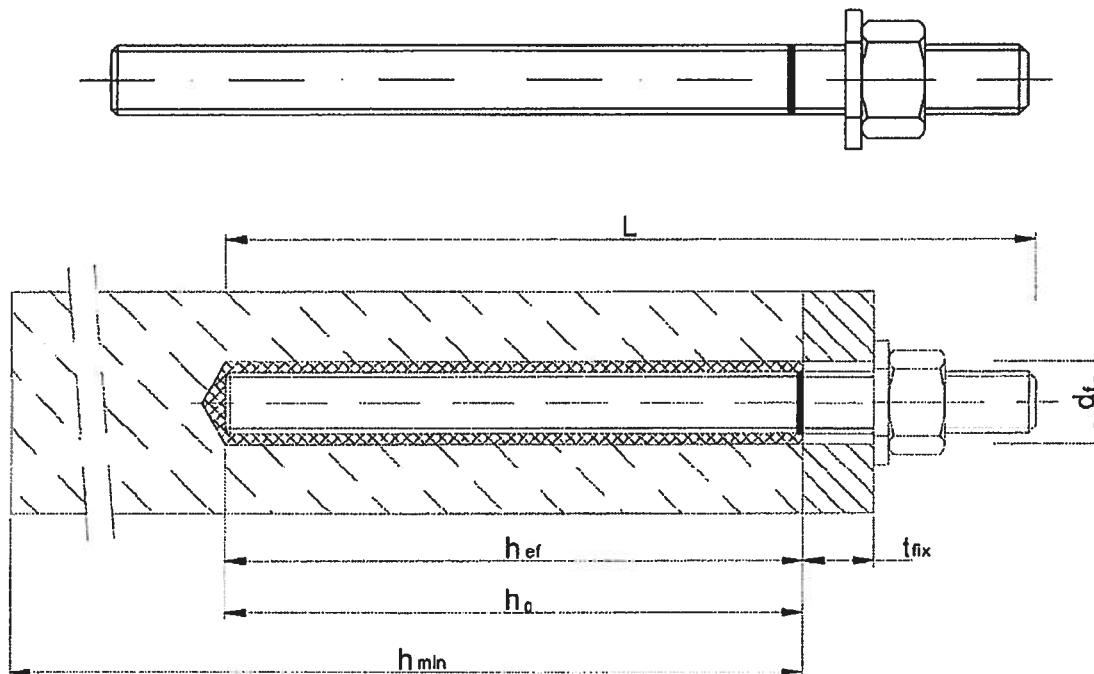


Table: Installation details "Würth Injection system WIT-VM 250 for concrete"

Anchor size	M8	M10	M12	M16	M20	M24	M30
Norminal drill diameter      d <sub>f</sub> [mm] =	10	12	14	18	24	28	35
Drill bit diameter      d <sub>cut</sub> [mm] =		12.5	14.5	18.5	24.5	28.5	35.5
Depth of borehole      h <sub>0</sub> [mm] =	80	90	110	125	175	210	280
Through hole in connected member      d <sub>f</sub> [mm] ≤	9	12	14	18	22	26	33
Steel brush diameter      d <sub>b</sub> [mm] =	12	14	16	20	26	30	37
Torque      T <sub>inst</sub> [Nm] =	10	20	40	80	120	160	200
Min. member thickness      h <sub>min</sub> [mm]	110	120	140	160	215	260	340

## Technical data

**"Würth Injection system WIT-VM 250 for concrete"**


**Materialprüfanstalt für das Bauwesen**  
 Institut für Baustoffe, Massivbau und Brandschutz  
 der Technischen Universität Braunschweig

Annex 1.5 of

Test Report

No.: 3058/042/12

# ETK DIN EN 1363-1

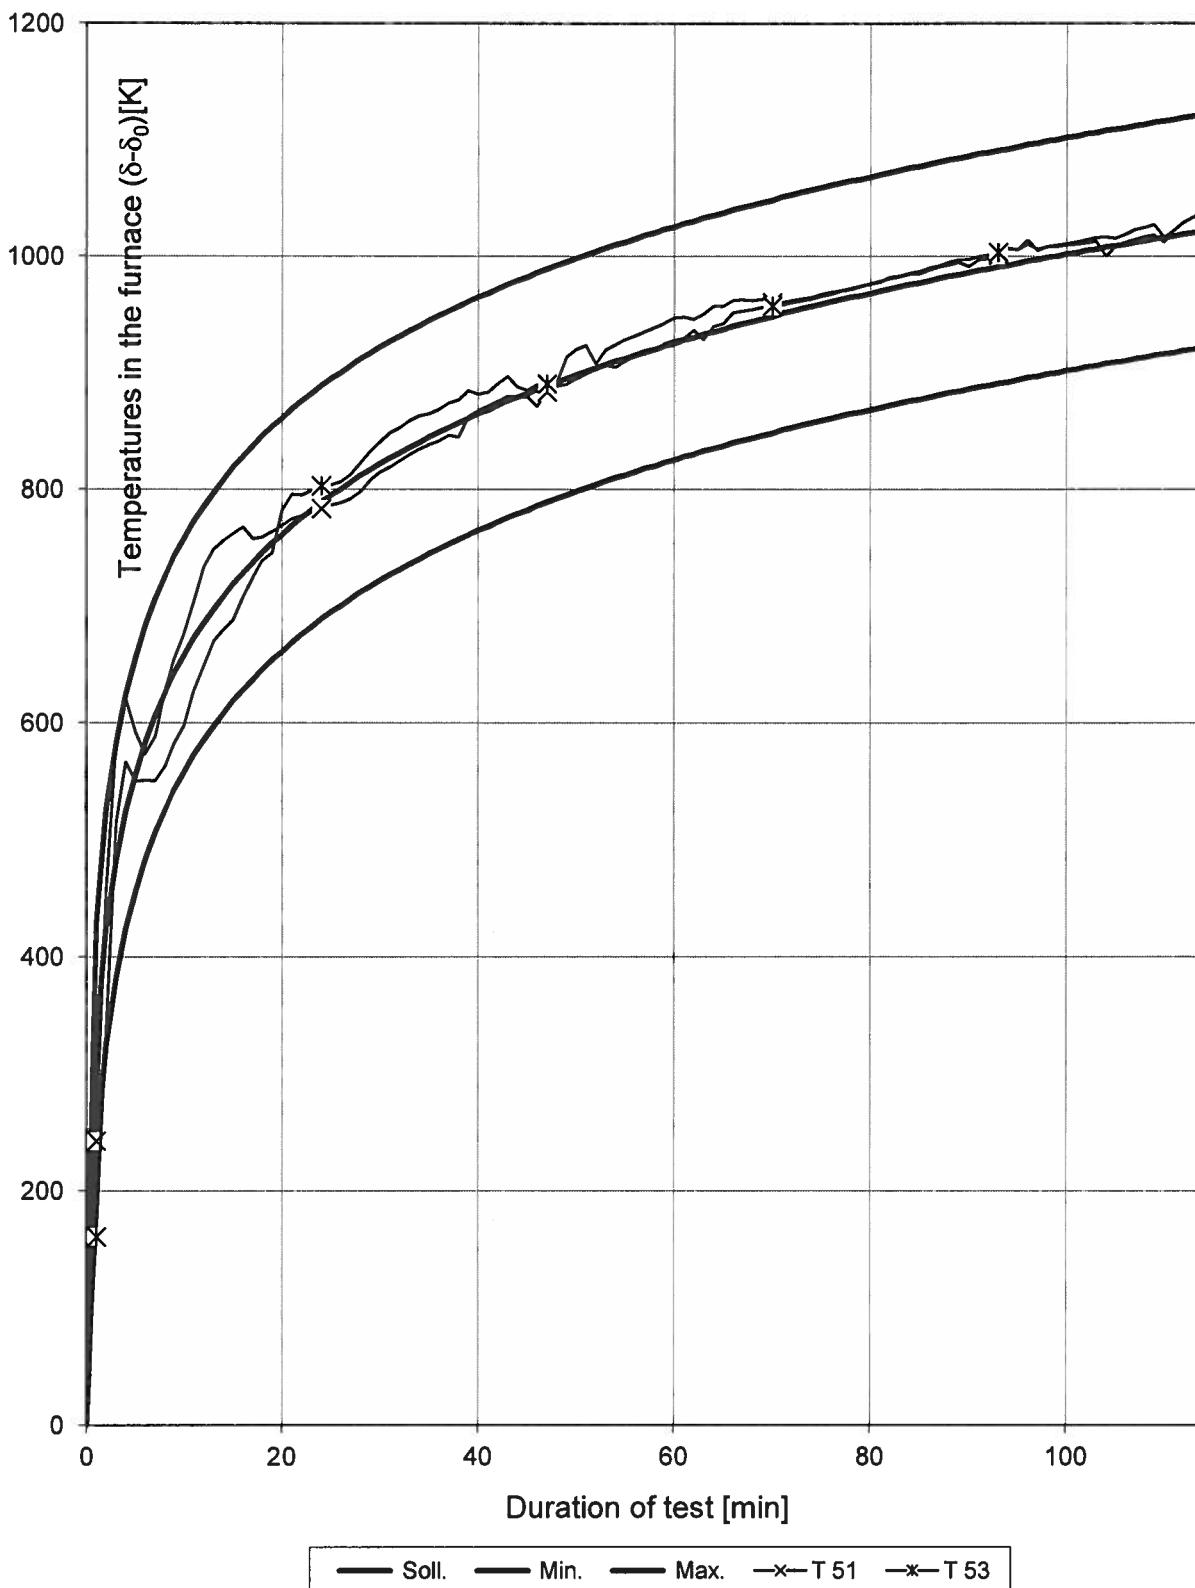


$\delta_0 = 16 \text{ } ^\circ\text{C}$

test date: 21.11.06

Temperatures in the furnace  
test 1

Materialprüfanstalt für das Bauwesen  
Institut für Baustoffe, Massivbau und Brandschutz  
der Technischen Universität Braunschweig


Annex 2.1 of  
Test Report  
No.: 3058/042/12

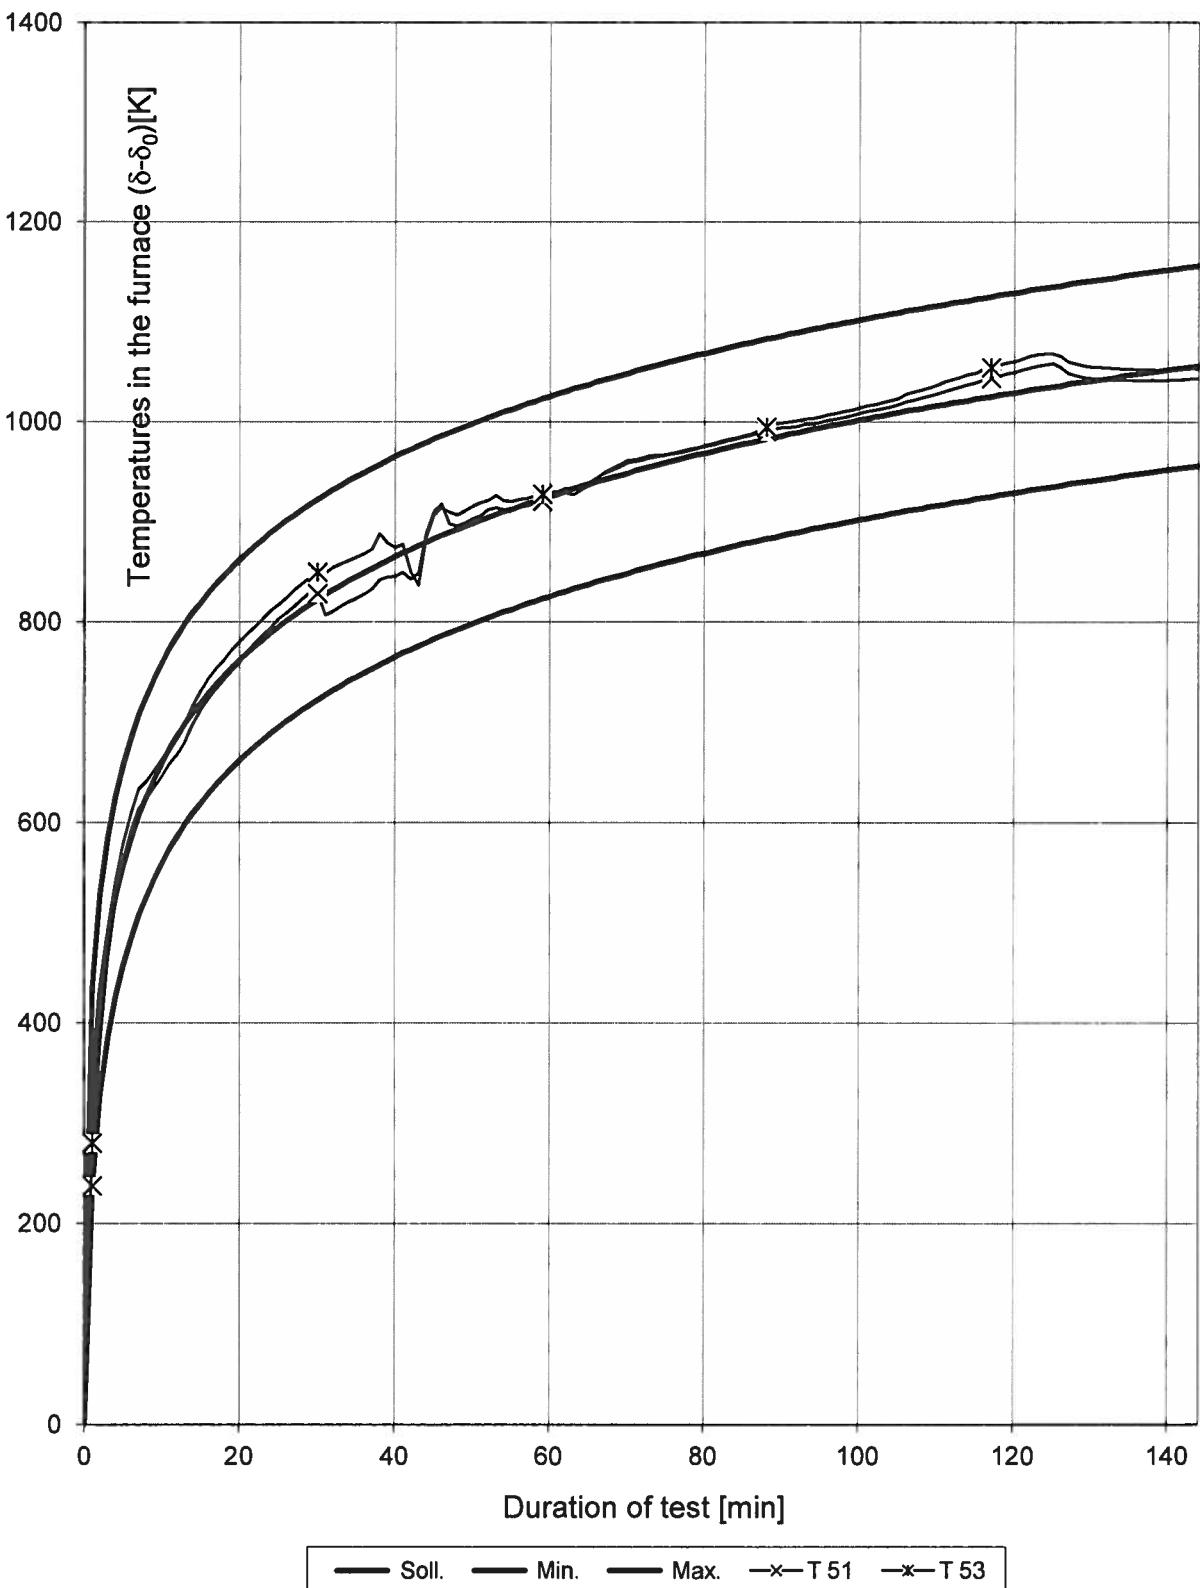 $\delta_0 = 17 \text{ } ^\circ\text{C}$ 

test date: 28.11.06

Temperatures in the furnace  
test 2Materialprüfanstalt für das Bauwesen  
Institut für Baustoffe, Massivbau und Brandschutz  
der Technischen Universität BraunschweigAnnex 3.1 of  
Test Report  
No.: 3058/042/12

# ETK DIN EN 1363-1

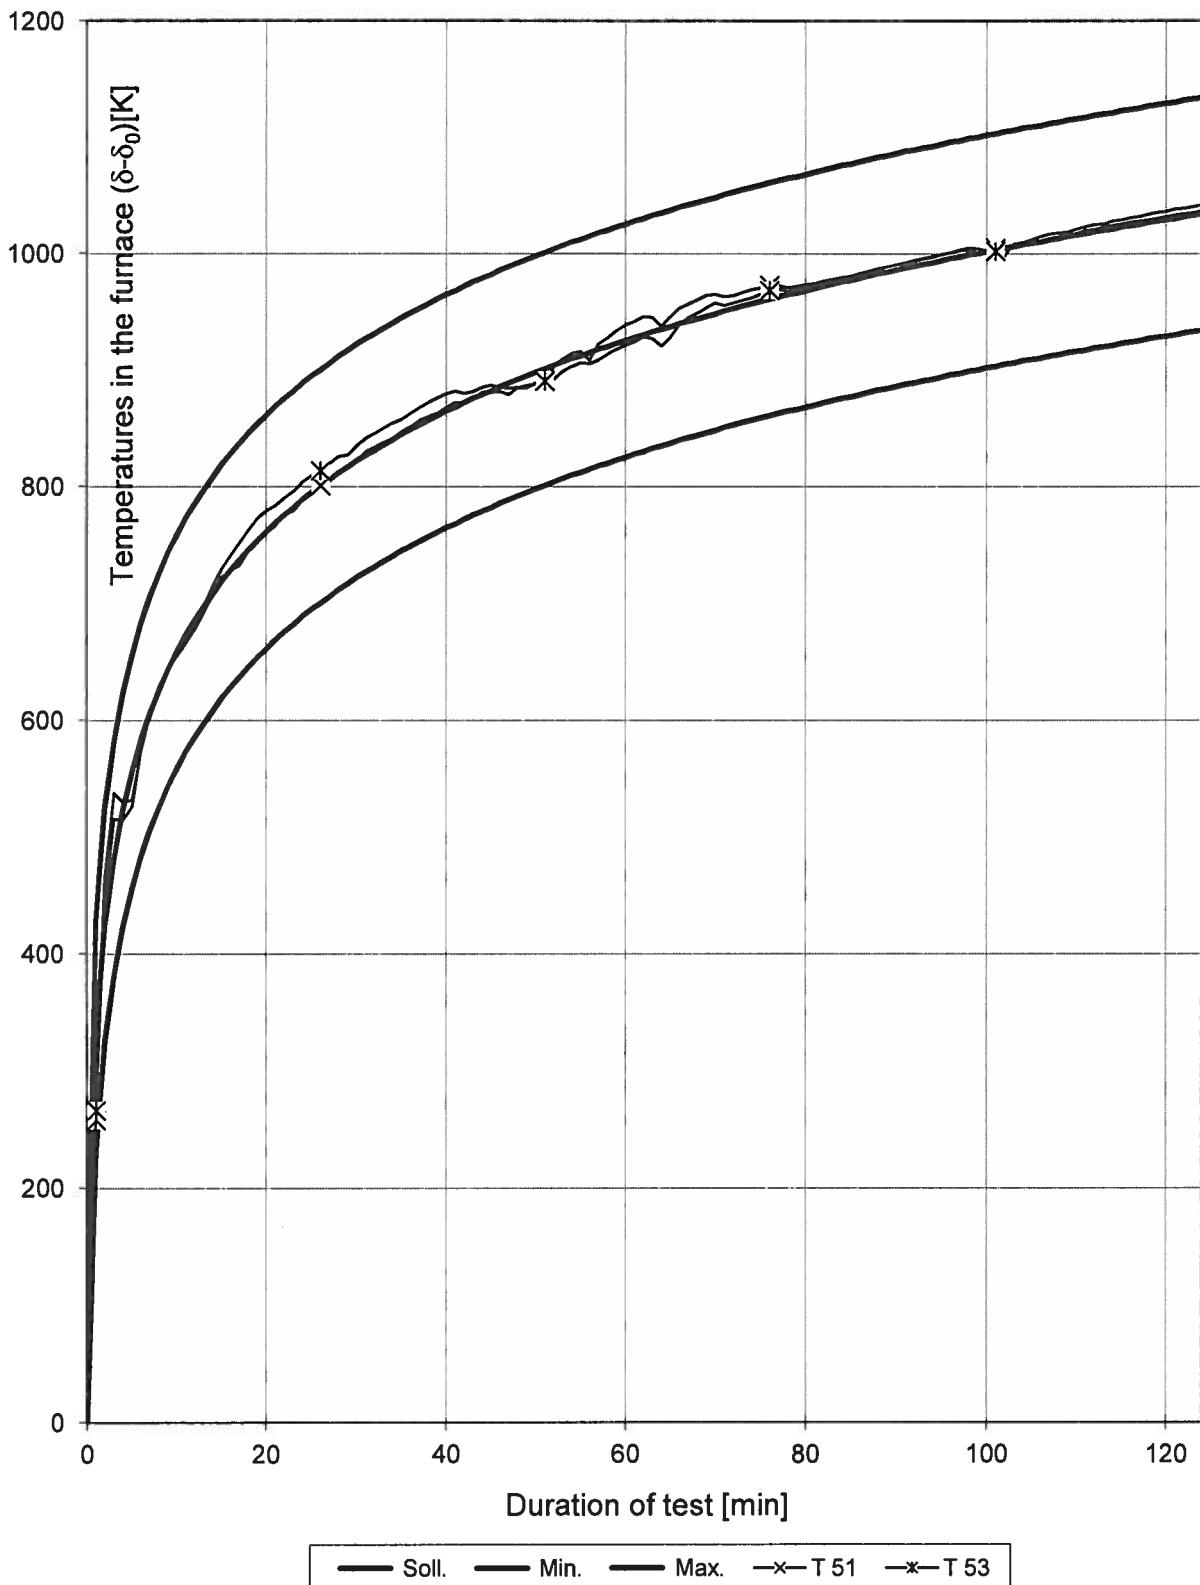


$\delta_0 = 18^\circ\text{C}$

test date: 06.12.06

Temperatures in the furnace  
test 3

Materialprüfanstalt für das Bauwesen  
Institut für Baustoffe, Massivbau und Brandschutz  
der Technischen Universität Braunschweig


Annex 4.1 of  
Test Report  
No.: 3058/042/12

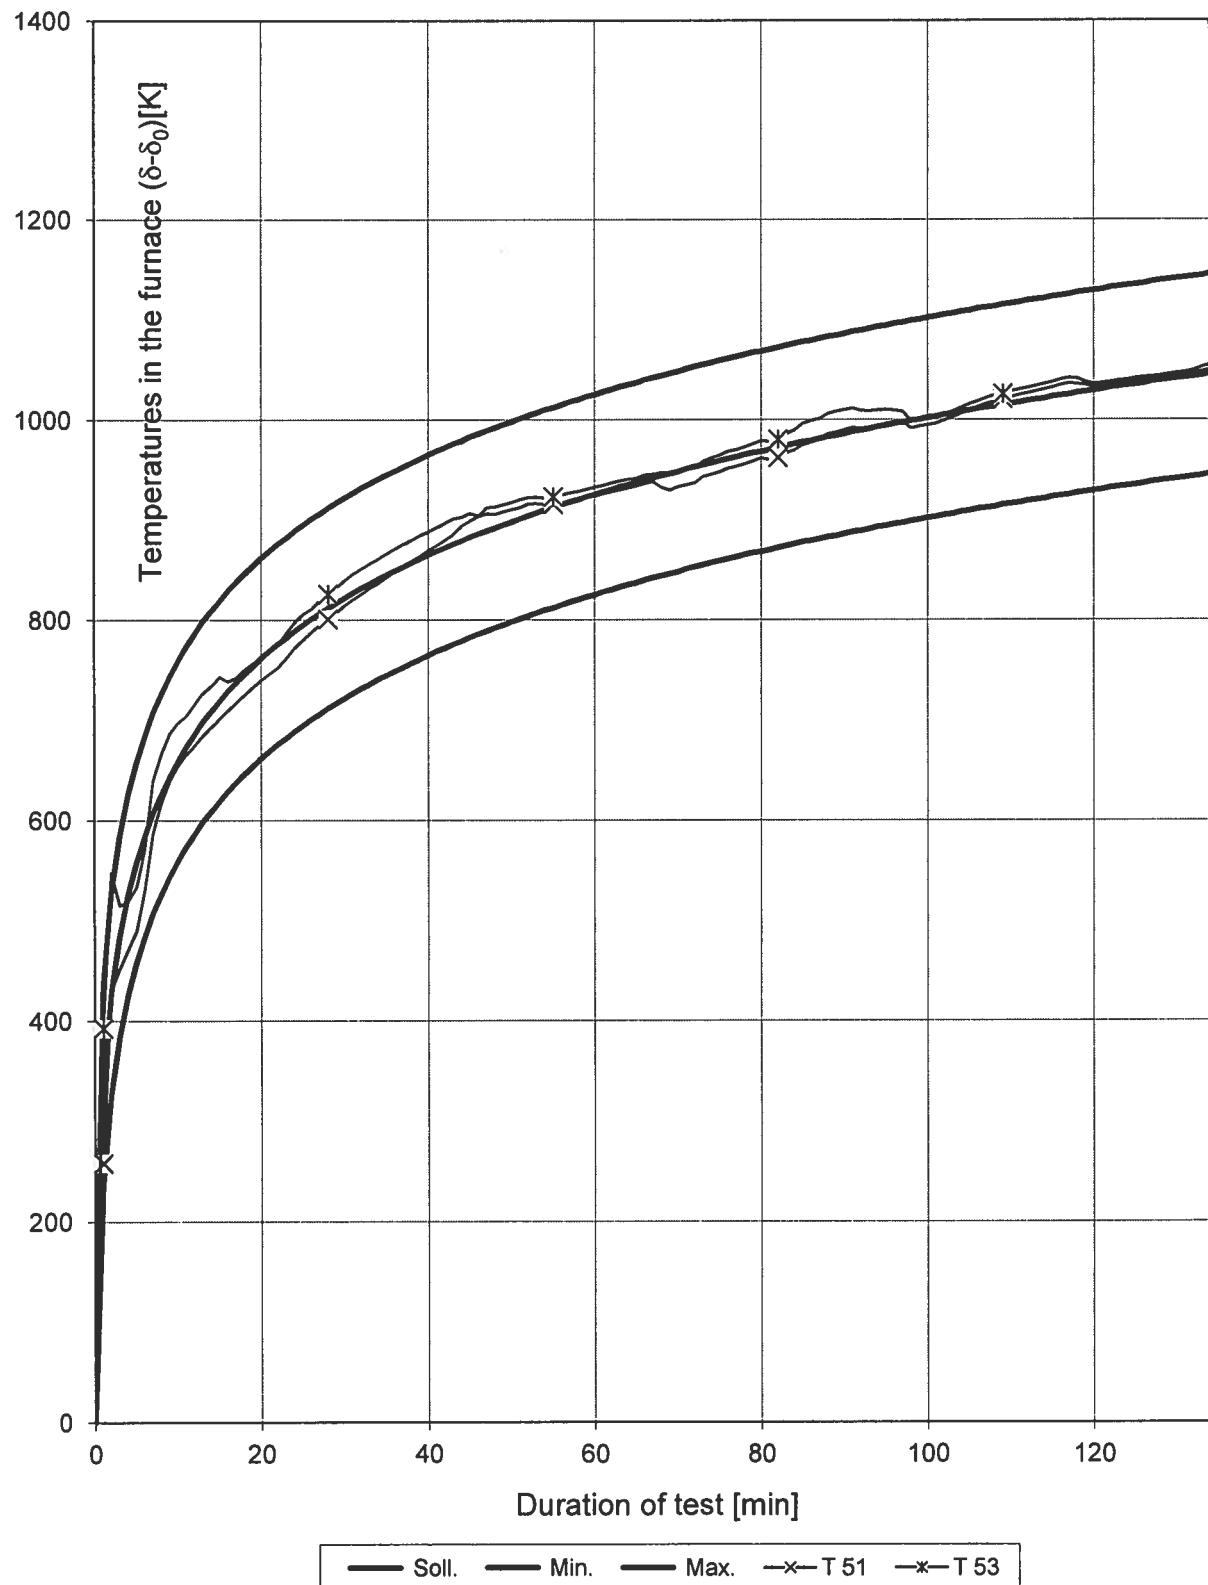 $\delta_0 = 18^\circ\text{C}$ 

test date: 24.01.07

Temperatures in the furnace test 4	Annex 5.1 of Test Report
Materialprüfanstalt für das Bauwesen Institut für Baustoffe, Massivbau und Brandschutz der Technischen Universität Braunschweig	No.: 3058/042/12

# ETK DIN EN 1363-1

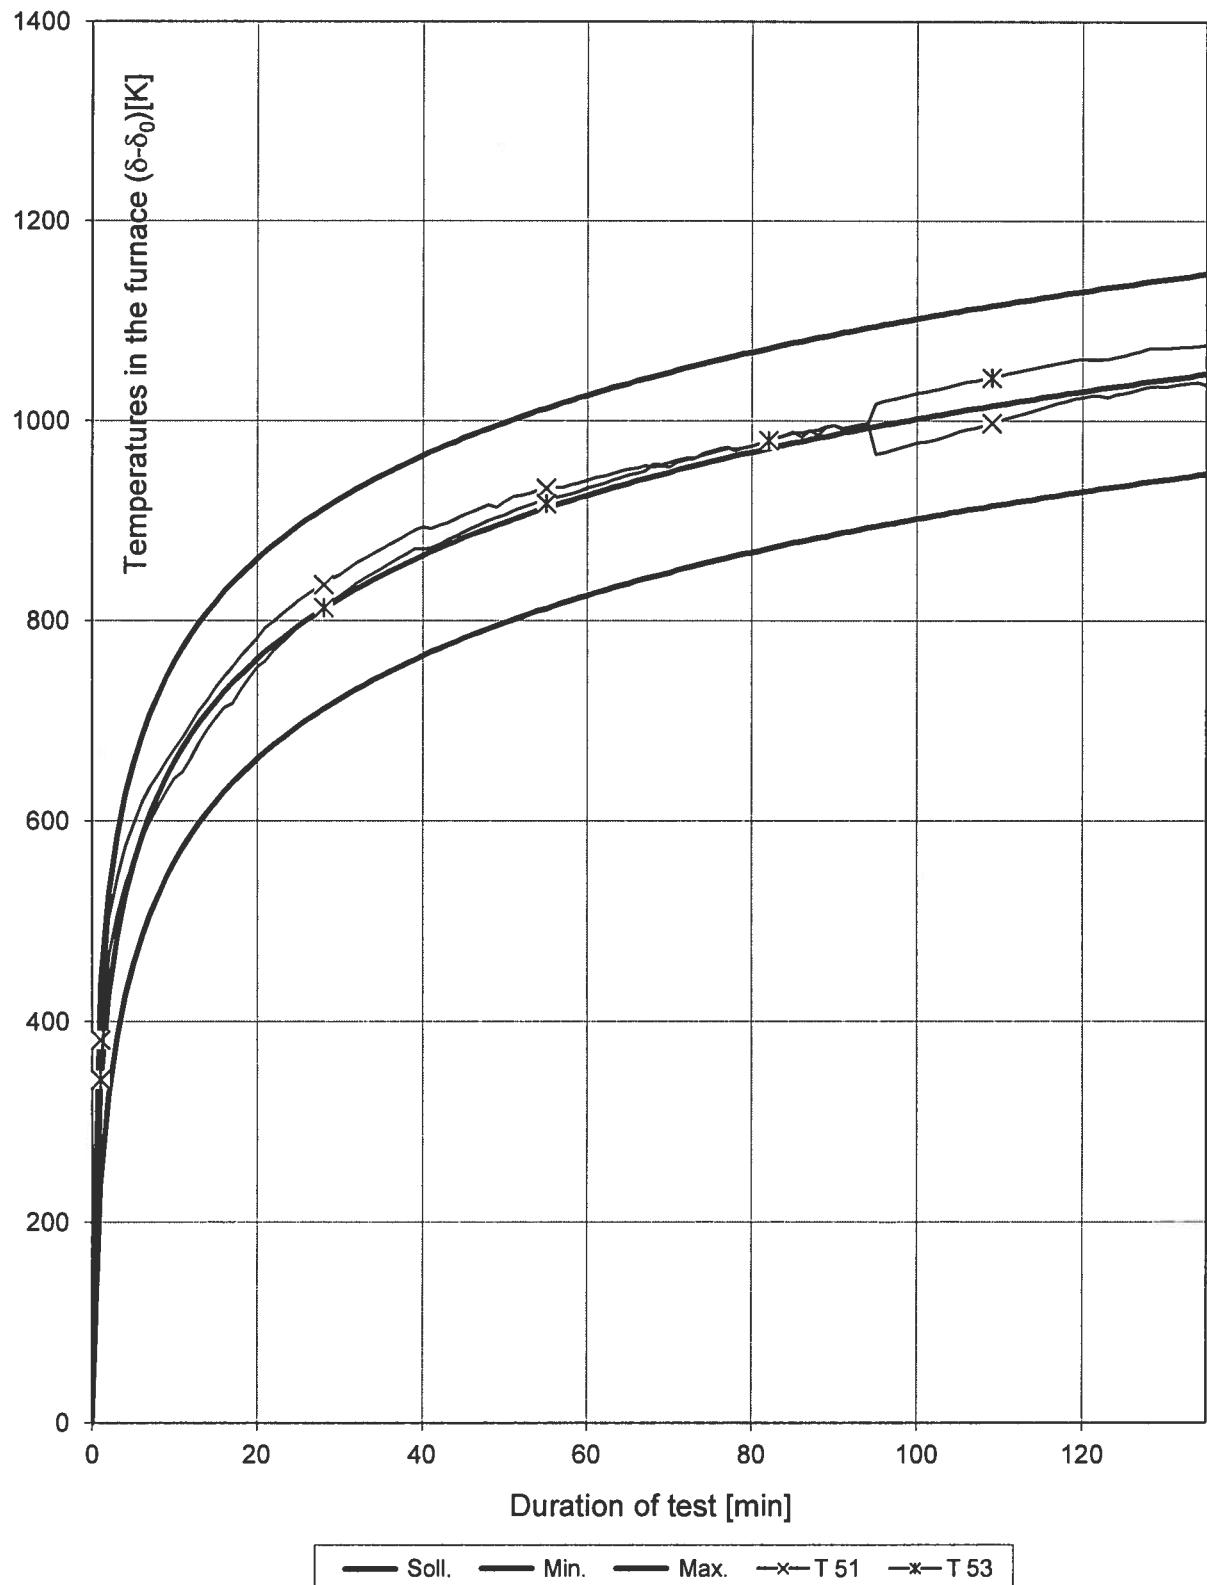

$\delta_0 = 19^\circ\text{C}$

test date: 20.02.07

Temperatures in the furnace  
test 5

Materialprüfanstalt für das Bauwesen  
Institut für Baustoffe, Massivbau und Brandschutz  
der Technischen Universität Braunschweig

Annex 6.1 of  
Test Report  
No.: 3058/042/12

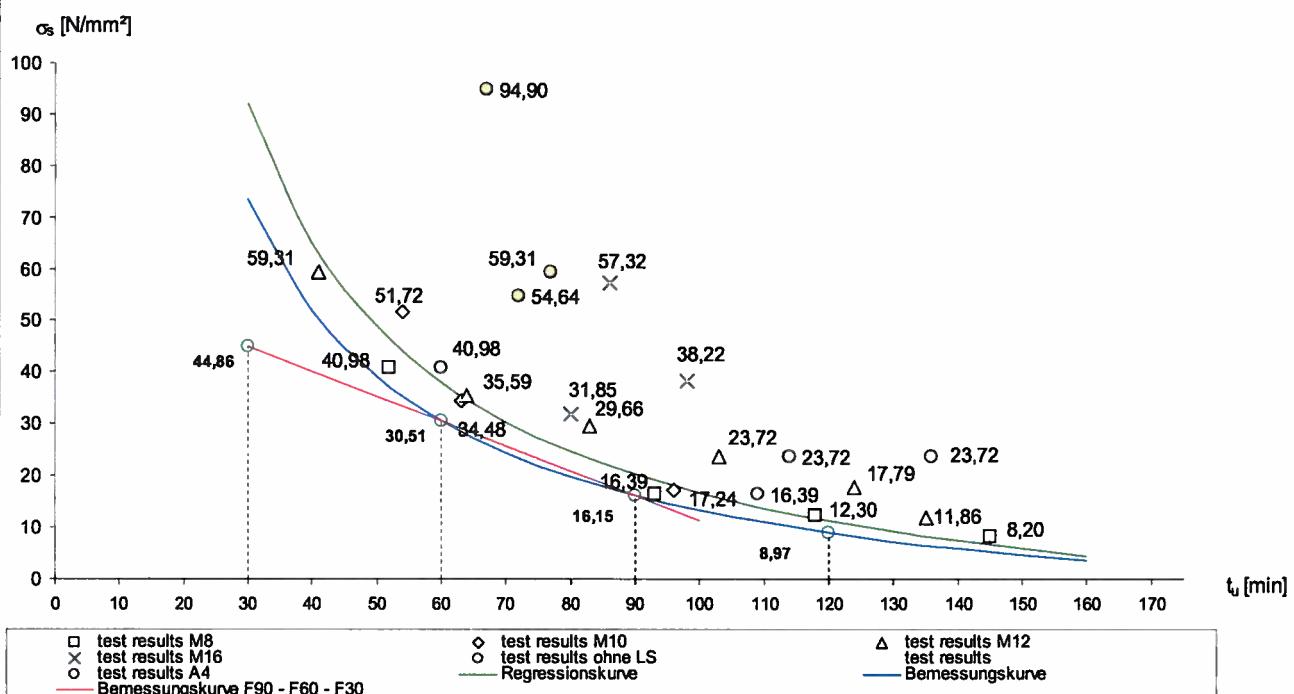


Fig. 1: Evaluation M8 to M10

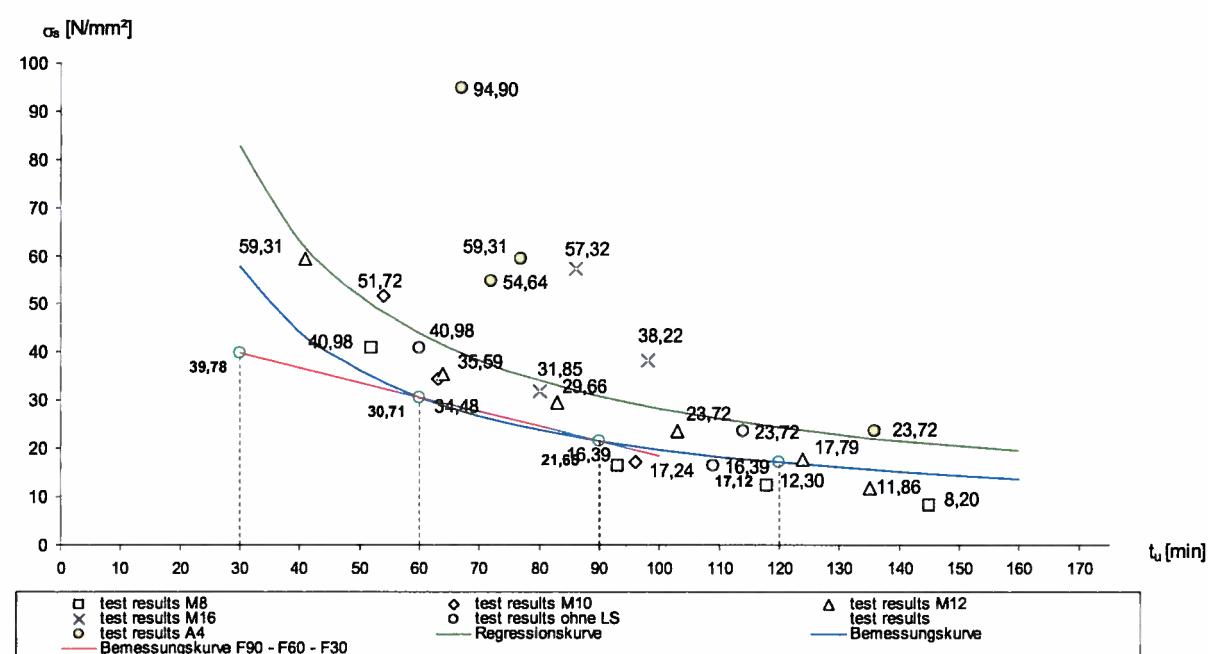


Fig. 2: Evaluation M12 to M30

### Evaluation of test results

“Würth Injection system WIT-VM 250 for concrete”

**Materialprüfanstalt für das Bauwesen**  
Institut für Baustoffe, Massivbau und Brandschutz  
der Technischen Universität Braunschweig

Annex 7.1 of  
Test Report  
No.: 3058/042/12

## Companion Sheet to Test Report

### - Translation -

Document No.:	(3058/042/12) – NB dated 28.06.2012
Client:	Adolf Würth GmbH & Co.KG Reinhold-Würth-Straße 12-17 74653 Künzelsau Deutschland
Order date:	28.06.2012
Order Ref.:	-
Order received:	28.06.2012
Subject:	"Würth Injection system WIT-VM 250 for concrete", bonded anchors placed in the non-cracked tension zone of RC floor sections, strength class $\geq$ C20/25, and subjected to centric tension loads, to be tested and evaluated in connection with anchor rods (dimensions M8 to M30) for their reaction to fire to determine their fire resistance time
Test basis:	DIN EN 1363-1 : 1999-10
Test material received:	Week 46/2006
Sampling:	The Testing House does not have any information indicating official sampling.
Test material marking:	None
Test date:	21/11/2006, 28/11/2006, 06/12/2006, 24/01/2007 and 20/02/2007
Valid until:	06/03/2013

This Companion Sheet consists of 4 pages, incl. cover sheet.



This Companion Sheet to Test Report may not be circulated unless as a complete text and without any alterations. Excerpts or abridged versions of the Test Report are subject to approval in writing of MPA Braunschweig. Translations of this document must bear the note "translation of the German original not examined by the Braunschweig Civil Engineering Materials Testing Institute". The first sheet of this document and the page carrying the signatures bear the official stamp of MPA Braunschweig. Documents that do not carry a signature and the official stamp are invalid. The test material has been tested. Accreditations are valid for the testing methods specified in the current documents. A list showing fields for which accreditation has been obtained can be made available upon request.

## 1 Background and general statement

Under the order placed with the Testing House, a Test Report was to be drawn up on the reaction to fire of "Würth Injection system WIT-VM 250 for concrete" bonded anchors, which are subjected to centric tension and tested for steel failure in compliance with section 2.3 of TR 020 : 2004-05, when exposed to a fire in compliance with DIN EN 1363-1 : 1999-10 to determine their fire resistance time.

Related documents:

- (1) DIN EN 1363-1 : 1999-10, Fire resistance tests - Part 1: General requirements,
- (2) EOTA Technical Report TR 020 : 2004-05 - Evaluation of anchorages in concrete concerning resistance to fire,
- (3) "Würth Injection system WIT-VM 250 for concrete", European Technical Approval ETA-12/0164 of 26-03-2012, issued by DIBt, Berlin.

Using the results achieved in the fire test, the "Würth Injection system WIT-VM 250 for concrete" bonded anchors were to be examined and evaluated respecting requirements (steel failure, pullout) specified in EOTA Technical Report TR 020 : 2004-05.

## 2 Proposed rating for the "Würth Injection system WIT-VM 250 for concrete" bonded anchors (dimensions M8 to M30) in connection with anchor rods made from electro-galvanized steel (strength class $\geq 5.8$ )

Using the results achieved in the tests as a basis, fire resistance periods are proposed for the "Würth Injection system WIT-VM 250 for concrete" bonded anchors (dimensions M8 to M30) made from electro-galvanized steel as shown in table 2-1 below as a function of the maximum centric tensile load.

Based on the results achieved in the tests, and departing from the evaluation specifications in TR 020 : 2004-05, the ratings for "Würth Injection system WIT-VM 250 for concrete" bonded anchors made from electro-galvanized steel have been increased with regard to the 30-minute fire resistance time.

Table 2-1: Proposed rating for “Würth Injection system WIT-VM 250 for concrete” bonded anchors (dimensions M8 – M30) made from electro-galvanized steel and stainless steel, regarding their fire resistance times as a function of stress  $\sigma_s$  when exposed to centric tensile loads

Designation  Fire resistance time  $t_u$ [min]	“Würth Injection system WIT-VM 250 for concrete” bonded anchor						
	Maximum tensile load <sup>1)</sup>						
	$F$ [kN]						
M8	M10	M12	M16	M20	M24	M30	
Minimum set depth [mm]	80	90	110	125	175	210	280
30	1.64	2.60	3.35	6.25	9.75	14.04	18.26
60	1.12	1.77	2.59	4.82	7.52	10.84	14.10
90	0.59	0.94	1.82	3.40	5.30	7.64	9.94
120	0.33	0.52	1.44	2.69	4.19	6.04	7.86

<sup>1)</sup> Loads resulting from European Technical Approval ETA-12/0164 of 26-03-2012 may be decisive for the service condition.

### 3 Proposed rating for the “Würth Injection system WIT-VM 250 for concrete” bonded anchors (dimensions M8 – M30) in connection with anchor rods made from stainless steel

Starting from the results achieved in the tests, the same characteristic tensile stresses (cf. table 2-1) are recommended for the “Würth Injection system WIT-VM 250 for concrete” bonded anchors, when adequate anchor rods made from stainless steel (material No. 1.4401 (A4) or 1.4571 (A5), 1.4529 (HCR) strength class 70) and nuts made from stainless steel (A4, strength class A-70) are used.

#### 4 Annotations

- 4.1 This Test Report does not replace the attestation (General Building Code Test Certificate - abP; National Technical Approval - abZ, ETA) required under the German building code procedure. It should, in particular, be noted that the fire load density values of "Würth Injection system WIT-VM 250 for concrete" bonded anchors can in the future be regulated by European Technical Approvals.
- 4.2 The above evaluation shall only apply to the tested "Würth Injection system WIT-VM 250 for concrete" bonded anchors, due consideration being given to the boundary conditions shown in the technical annexes attached to this Test Report and/or the technical data sheets of Würth GmbH & Co.KG
- 4.3 The "Würth Injection system WIT-VM 250 for concrete" bonded anchors may be used for anchoring applications in non-cracked reinforced concrete (strength class C20/25 as a minimum and C50/60 as a maximum) when primarily subjected to static loads.
- 4.4 The evaluation shall only apply in connection with members made from reinforced concrete, which can as a minimum be classified under the same fire resistance class as that of the anchors.
- 4.5 The validity of the Test Report will expire on 06/03/2013.

Rohling  
ORR Dr.-Ing. Rohling  
Head of Testing Laboratory



by order Bollmohr  
Dipl.-Ing. Bollmohr  
Engineer in charge