



ETA-Danmark A/S  
Göteborg Plads 1  
DK-2150 Nordhavn  
Tel. +45 72 24 59 00  
Fax +45 72 24 59 04  
Internet [www.etadanmark.dk](http://www.etadanmark.dk)

Authorised and notified according  
to Article 29 of the Regulation (EU)  
No 305/2011 of the European  
Parliament and of the Council of 9  
March 2011

MEMBER OF EOTA



## European Technical Assessment ETA-09/0216 of 02/09/2014

### General Part

#### Technical Assessment Body issuing the ETA and designated according to Article 29 of the Regulation (EU) No 305/2011: ETA-Danmark A/S

Trade name of the  
construction product:

Drüeke & Springob Various Angle Brackets type 1130,  
1134, 1135, 1136, 1137, 1138, 1139, 1210, 1211, 1212,  
1213.2, 1214, 1215, 1219, 1220, 1221, 1222, 1226,  
1227, 1228, 1229, 1230, 1231, 1232, 1233, 1234, 1235

Product family to which the  
above construction product  
belongs:

Three-dimensional nailing plate (Angle Bracket for  
timber-to-timber or timber to concrete connections)

Manufacturer:

Drüeke & Springob GmbH  
Bahnstrasse 19  
57439 Attendorn - Kraghammer  
Tel. +49 02722 - 7771  
Fax +49 02722 – 7922

Manufacturing plant:

Drüeke & Springob GmbH  
Bahnstrasse 19  
57439 Attendorn - Kraghammer

This European Technical  
Assessment contains:

40 pages including 2 annexes which form an integral  
part of the document

This European Technical  
Assessment is issued in  
accordance with Regulation  
(EU) No 305/2011, on the  
basis of:

Guideline for European Technical Approval (ETAG) No.  
015 Three Dimensional Nailing Plates, April 2013, used  
as European Assessment Document (EAD).

This version replaces:

The ETA with the same number issued on 2009-09-09  
and expiry on 2014-09-09

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made, with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such

## II SPECIFIC PART OF THE EUROPEAN TECHNICAL ASSESSMENT

### 1 Technical description of product and intended use

#### Technical description of the product

Drüeke & Springob angle brackets are one-piece non-welded, face-fixed angle brackets to be used in timber to timber or in timber to concrete or to steel connections. They are connected to construction members made of timber or wood-based products with profiled (ringed shank) nails according to EN 14592 and to concrete or steel members with bolts or metal anchors.

The angle brackets are made from pre-galvanized steel DX 51 D / Z 275 according to EN 10346:2009 with  $R_e \geq 295 \text{ N/mm}^2$ ,  $R_m \leq 360 \text{ N/mm}^2$  and  $A_{80} \geq 22\%$ . Dimensions, hole positions and typical installations are shown in Annex A. Drüeke & Springob angle brackets are made from steel with tolerances according to EN 10143.

### 2 Specification of the intended use in accordance with the applicable EAD

The angle brackets are intended for use in making connections in load bearing timber structures, as a connection between a beam and a purlin, where requirements for mechanical resistance and stability and safety in use in the sense of the Basic Work Requirements 1 and 4 of the Regulation 305/2011 (EU) shall be fulfilled.

The connection may be with a single angle bracket or with an angle bracket on each side of the fastened timber member (see Annex A).

The static and kinematical behaviour of the timber members or the supports shall be as described in Annex B.

The wood members may be of solid timber, glued laminated timber and similar glued members, or wood-based structural members with a characteristic density from  $290 \text{ kg/m}^3$  to  $420 \text{ kg/m}^3$ . This requirement to the material of the wood members can be fulfilled by using the following materials:

- Structural solid timber classified to C14-C40 according to EN 338 / EN 14081,
- Glulam classified to GL24-GL36 according to EN 1194 / EN 14080,
- LVL according to EN 14374,
- Parallam PSL,
- Intrallam LSL,
- Duo- and Triobalken,
- Layered wood plates,

- Plywood according to EN 636

Annex B states the load-carrying capacities of the angle bracket connections for a characteristic density of  $350 \text{ kg/m}^3$ . For timber or wood based material with a lower characteristic density than  $350 \text{ kg/m}^3$  the load-carrying capacities shall be reduced by the  $k_{\text{dens}}$  factor:

$$k_{\text{dens}} = \left( \frac{\rho_k}{350} \right)^2$$

Where  $\rho_k$  is the characteristic density of the timber in  $\text{kg/m}^3$ .

The design of the connections shall be in accordance with Eurocode 5 or a similar national Timber Code. The wood members shall have a thickness which is larger than the penetration depth of the nails into the members.

The angle brackets are primarily for use in timber structures subject to the dry, internal conditions defined by service classes 1 and 2 of Eurocode 5 and for connections subject to static or quasi-static loading.

The angle brackets can also be used in outdoor timber structures, service class 3, when a corrosion protection in accordance with Eurocode 5 is applied, or when stainless steel with similar or better characteristic yield and ultimate strength is employed.

The scope of the connectors regarding resistance to corrosion shall be defined according to national provisions that apply at the installation site considering environmental conditions and in conjunction with the admissible service conditions according to EN 1995-1-1 and the admissible corrosivity category as described and defined in EN ISO 12944-2

#### Assumed working life

The assumed intended working life of the angle brackets for the intended use is 50 years, provided that they are subject to appropriate use and maintenance.

The information on the working life should not be regarded as a guarantee provided by the manufacturer or ETA Danmark. An "assumed intended working life" means that it is expected that, when this working life has elapsed, the real working life may be, in normal use conditions, considerably longer without major degradation affecting the essential requirements.

### 3 Performance of the product and references to the methods used for its assessment

Characteristic	Assessment of characteristic
<b>3.1 Mechanical resistance and stability (BWR 1)*)</b>	
Characteristic load-carrying capacity	See Annex B
Stiffness	No performance determined
Ductility in cyclic testing	No performance determined
<b>3.2 Safety in case of fire (BWR 2)</b>	
Reaction to fire	The angle brackets are made from steel classified as <b>Euroclass A1</b> in accordance with EN 13501-1:2007+A1:2009 and EC decision 96/603/EC, amended by EC Decision 2000/605/EC
<b>3.3 Hygiene, health and the environment (BWR 3)</b>	
Influence on air quality	The product does not contain/release dangerous substances specified in TR 034, dated March 2012
<b>3.7 Sustainable use of natural resources (BWR 7)</b>	No Performance Determined
<b>3.8 General aspects related to the performance of the product</b>	The angle brackets have been assessed as having satisfactory durability and serviceability when used in timber structures using the timber species described in Eurocode 5 and subject to the conditions defined by service class 1 and 2
Identification	See Annex A

\*) See additional information in section 3.9 – 3.12.

In addition to the specific clauses relating to dangerous substances contained in this European technical Assessment, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the Construction Products Regulation, these requirements need also to be complied with, when and where they apply.

### 3.9 Methods of verification

#### Safety principles and partial factors

The characteristic load-carrying capacities are based on the characteristic values of the nail connections and the steel plates. To obtain design values the capacities have to be divided by different partial factors for the material properties, the nail connection in addition multiplied with the coefficient  $k_{\text{mod}}$ .

According to EN 1990 (Eurocode – Basis of design) paragraph 6.3.5 the design value of load-carrying capacity may be determined by reducing the characteristic values of the load-carrying capacity with different partial factors.

Thus, the characteristic values of the load-carrying capacity are determined also for timber failure  $F_{\text{Rk,H}}$  (obtaining the embedment strength of nails subjected to shear or the withdrawal capacity of the most loaded nail, respectively) as well as for steel plate failure  $F_{\text{Rk,S}}$ . The design value of the load-carrying capacity is the smaller value of both load-carrying capacities.

$$F_{\text{Rd}} = \min \left\{ \frac{k_{\text{mod}} \cdot F_{\text{Rk,H}}}{\gamma_{\text{M,H}}}, \frac{F_{\text{Rk,S}}}{\gamma_{\text{M,S}}} \right\}$$

Therefore, for timber failure the load duration class and the service class are included. The different partial factors  $\gamma_{\text{M}}$  for steel or timber, respectively, are also correctly taken into account.

#### 3.10 Mechanical resistance and stability

See annex B for the characteristic load-carrying capacity in the different directions  $F_1$  to  $F_5$ .

The characteristic capacities of the angle brackets are determined by calculation assisted by testing as described in the EOTA Guideline 015 clause 5.1.2. They should be used for designs in accordance with Eurocode 5 or a similar national Timber Code.

*Threaded nails (ringed shank nails) in accordance to EN 14592*

In the formulas in Annex B the capacities for threaded nails calculated from the formulas of Eurocode 5 are used assuming a thick steel plate when calculating the lateral nail load-carrying-capacity.

The load bearing capacities of the brackets has been determined based on the use of connector nails 4,0 x 40 mm in accordance with the German national approval for the nails.

The characteristic withdrawal capacity of the nails has to be determined by calculation in accordance with EN 1995-1-1: 2004, paragraph 8.3.2 (head pull-through is not relevant):

$$F_{\text{ax,Rk}} = f_{\text{ax,k}} \times d \times t_{\text{pen}}$$

Where:

$f_{\text{ax,k}}$	Characteristic value of the withdrawal parameter in $\text{N}/\text{mm}^2$
$d$	Nail diameter in mm
$t_{\text{pen}}$	Penetration depth of the profiled shank including the nail point in mm, $t_{\text{pen}} \geq 31$ mm

Based on tests by Versuchsanstalt für Stahl, Holz und Steine, University of Karlsruhe, the characteristic value of the withdrawal resistance for the threaded nails used can be calculated as:

$$f_{\text{ax,k}} = 50 \times 10^{-6} \times \sigma_{\text{k}}^2$$

Where:

$\sigma_{\text{k}}$	Characteristic density of the timber in $\text{kg}/\text{m}^3$
---------------------	--

The shape of the nail directly under the head shall be in the form of a truncated cone with a diameter under the nail head which exceeds the hole diameter.

The design models allow the use of fasteners described in the table on page 9 in Annex A

No performance has been determined in relation to ductility of a joint under cyclic testing. The contribution to the performance of structures in seismic zones, therefore, has not been assessed.

No performance has been determined in relation to the joint's stiffness properties - to be used for the analysis of the serviceability limit state.

#### 3.11 Aspects related to the performance of the product

Corrosion protection in service class 1 and 2.

In accordance with ETAG 015 the angle brackets are made from pre-galvanized steel DX 51 D / Z 275 according to EN 10346:2009 with  $R_e \geq 295 \text{ N}/\text{mm}^2$ ,  $R_m \leq 360 \text{ N}/\text{mm}^2$  and  $A_{80} \geq 22\%$

#### 3.12 General aspects related to the use of the product

Drüeke & Springob angle brackets are manufactured in accordance with the provisions of this European Technical Approval using the manufacturing processes as identified in the inspection of the plant by the notified inspection body and laid down in the technical documentation

The nailing pattern used shall be either the maximum or the minimum pattern as defined in Annex A.

The following provisions concerning installation apply:

The structural members – the components 1 and 2 shown in the figure on page 14 - to which the brackets are fixed shall be:

- Restrained against rotation. At a load  $F_4/F_5$ , the component 2 is allowed to be restrained against rotation by the Angle brackets.
- Strength class C14 or better, see section 1 of this ETA
- Free from wane under the bracket.
- The actual end bearing capacity of the timber member to be used in conjunction with the bracket is checked by the designer of the structure to ensure it is not less than the bracket capacity and, if necessary, the bracket capacity reduced accordingly.
- The gap between the timber members does not exceed 3 mm.
- There are no specific requirements relating to preparation of the timber members.

The execution of the connection shall be in accordance with the approval holder's technical literature.

## **4 Assessment and verification of constancy of performance (AVCP)**

### **4.1 AVCP system**

According to the decision 97/638/EC of the European Commission<sup>1</sup>, as amended, the system(s) of assessment and verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) is 2+.

## **5 Technical details necessary for the implementation of the AVCP system, as foreseen in the applicable EAD**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at ETA-Danmark

Issued in Copenhagen on 2014-09-02 by



Thomas Bruun  
Managing Director, ETA-Danmark

**Annex A**  
**Product details definitions**

Table A.1 Materials specification

<b>Bracket number</b>	<b>Bracket type</b>	<b>Thickness (mm)</b>	<b>Steel specification</b>	<b>Coating specification</b>
1130	50 x 50 x 35	2,5	DX 51 D	Z 275
1134	50 x 90 x 55	2,5	DX 51 D	Z 275
1135	90 x 90 x 40	3,0	DX 51 D	Z 275
1136	90 x 40 x 40	3,0	DX 51 D	Z 275
1137	120 x 40 x 40	3,0	DX 51 D	Z 275
1138	140 x 40 x 40	3,0	DX 51 D	Z 275
1139	160 x 40 x 40	3,0	DX 51 D	Z 275
1210	40 x 40 x 40	2,0	DX 51 D	Z 275
1211	40 x 40 x 60	2,0	DX 51 D	Z 275
1212	40 x 40 x 80	2,0	DX 51 D	Z 275
1213.1	60 x 60 x 40	2,0	DX 51 D	Z 275
1214	60 x 60 x 50	2,0	DX 51 D	Z 275
1215	60 x 60 x 60	2,0	DX 51 D	Z 275
1219	80 x 80 x 80	2,0	DX 51 D	Z 275
1220	40 x 60 x 60	2,5	DX 51 D	Z 275
1221	40 x 40 x 60	2,5	DX 51 D	Z 275
1222	60 x 60 x 40	2,5	DX 51 D	Z 275
1226	60 x 60 x 50	2,5	DX 51 D	Z 275
1227	60 x 60 x 60	2,5	DX 51 D	Z 275
1228	60 x 80 x 60	2,5	DX 51 D	Z 275
1229	60 x 100 x 60	2,5	DX 51 D	Z 275
1230	80 x 80 x 60	2,5	DX 51 D	Z 275
1231	80 x 80 x 80	2,5	DX 51 D	Z 275
1232	100 x 100 x 80	2,5	DX 51 D	Z 275
1233	100 x 100 x100	2,5	DX 51 D	Z 275
1234	60 x 60 x100	2,5	DX 51 D	Z 275
1235	80 x 80 x100	2,5	DX 51 D	Z 275



Table A.2 Range of sizes

Bracket number	Bracket type	Height (mm)		Height (mm)		Width (mm)	
		vertical		horizontal			
1130	50 x 50 x 35	49	51	49	51	34	36
1134	50 x 90 x 55	49	51	89	91	54	56
1135	90 x 90 x 40	89	91	89	91	44	46
1136	90 x 40 x 40	89	91	39	41	39	41
1137	120 x 40 x 40	119	121	39	41	39	41
1138	140 x 40 x 40	139	141	39	41	39	41
1139	160 x 40 x 40	159	161	39	41	39	41
1210	40 x 40 x 40	39	41	39	41	39	41
1211	40 x 40 x 60	39	41	39	41	59	61
1212	40 x 40 x 80	39	41	39	41	79	81
1213.1	60 x 60 x 40	59	61	59	61	39	41
1214	60 x 60 x 50	59	61	59	61	49	51
1215	60 x 60 x 60	59	61	59	61	59	61
1219	80 x 80 x 80	79	81	79	81	79	81
1220	40 x 60 x 60	39	41	59	61	59	61
1221	40 x 40 x 60	39	41	39	41	59	61
1222	60 x 60 x 40	59	61	59	61	39	41
1226	60 x 60 x 50	59	61	59	61	49	51
1227	60 x 60 x 60	59	61	59	61	59	61
1228	60 x 80 x 60	59	61	79	81	59	61
1229	60 x 100 x 60	59	61	99	101	59	61
1230	80 x 80 x 60	79	81	79	81	59	61
1231	80 x 80 x 80	79	81	79	81	79	81
1232	100 x 100 x 80	99	101	99	101	79	81
1233	100 x 100 x 100	99	101	99	101	99	101
1234	60 x 60 x 100	59	61	59	61	99	101
1235	80 x 80 x 100	79	81	79	81	99	101

Table A.3 Fastener specification

Nail type	Nail size (mm)		Finish
	Diameter	Length	
According to EN 14592			
Threaded nail	4,0	40	Electroplated zinc

In the load-carrying-capacities of the nailed connection in Annex B the capacities for threaded nails calculated from the formulas of Eurocode 5 are used assuming a thick steel plate when calculating the lateral nail load-carrying-capacity. The load-carrying-capacities of the angle brackets have been determined based on the use of connector nails 4,0 x 40 mm in accordance with the German national approval for the nails. The characteristic withdrawal capacity of the nails has to be determined by calculation in accordance with EN 1995-1-1:2004, paragraph 8.3.2 (head pull-through is not relevant):

$$F_{ax,Rk} = f_{ax,k} \times d \times t_{pen}$$

Where:

$f_{ax,k}$  Characteristic value of the withdrawal parameter in N/mm<sup>2</sup>  
 $d$  Nail diameter in mm  
 $t_{pen}$  Penetration depth of the profiled shank including the nail point in mm,  $t_{pen} \geq 31$  mm

Based on tests by Versuchsanstalt für Stahl, Holz und Steine, University of Karlsruhe, the characteristic value of the withdrawal resistance for the threaded nails used can be calculated as:

$$f_{ax,k} = 50 \times 10^{-6} \times \rho_k^2$$

Where:

$\rho_k$  Characteristic density of the timber in kg/m<sup>3</sup>

The shape of the nail directly under the head shall be in the form of a truncated cone with a diameter under the nail head which exceeds the hole diameter.

BOLTS diameter	Correspondence Hole diameter	Bolts type
12.0	Max. 2 mm. larger than the bolt diameter	See specification of the manufacturer

METAL ANCHORS diameter	Correspondence Hole diameter	Anchors type
12.0	Max. 2 mm. larger than the anchor diameter	See specification of the manufacturer

**Drüeke & Springob Angle Brackets**


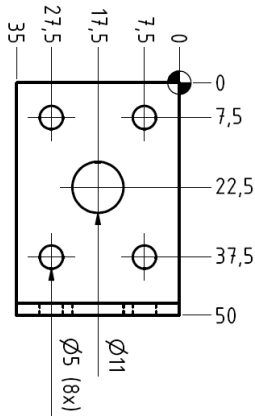


Figure A. 1 Dimensions of Angle Bracket 1130


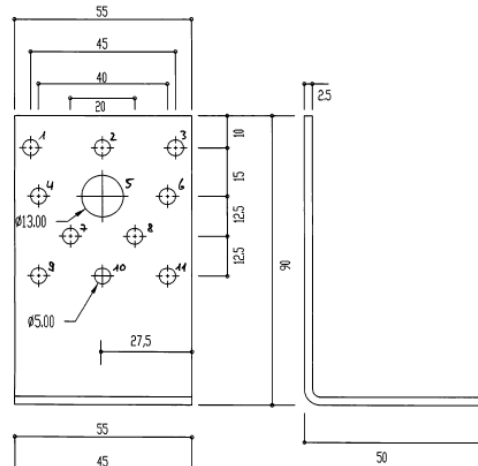


Figure A. 2 Dimensions of Angle Bracket 1134


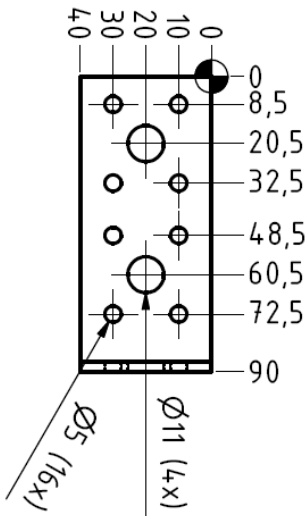


Figure A. 3 Dimensions of Angle Bracket 1135


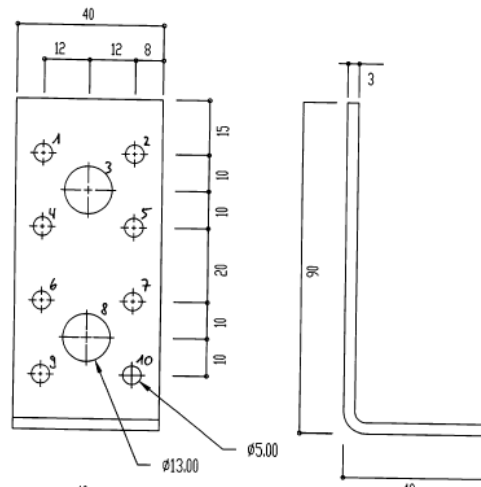


Figure A. 4 Dimensions of Angle Bracket 1136

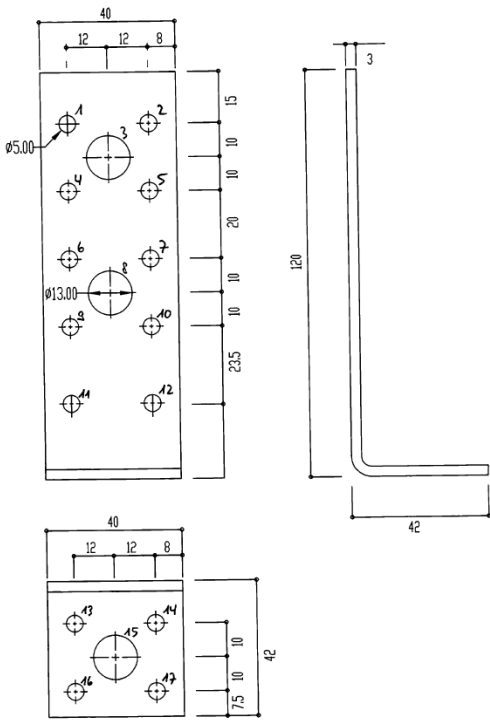


Figure A. 5 Dimensions of Angle Bracket 1137

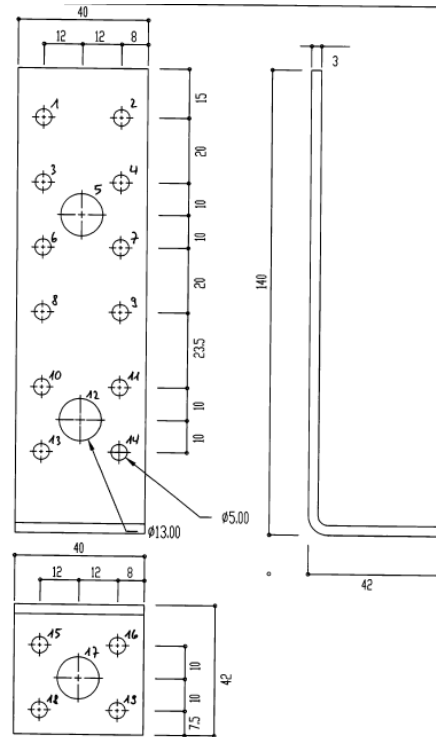


Figure A. 6 Dimensions of Angle Bracket 1138

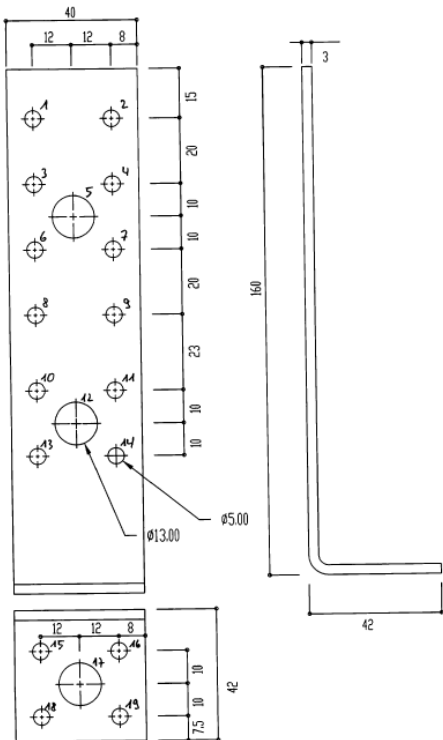


Figure A. 7 Dimensions of Angle Bracket 1139

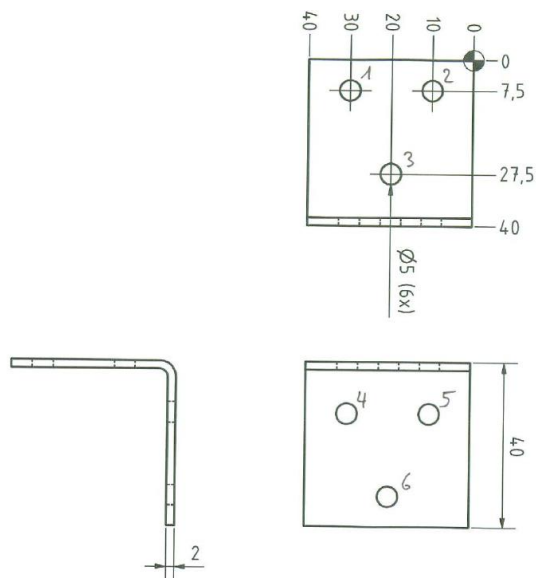


Figure A. 8 Dimensions of Angle Bracket 1210

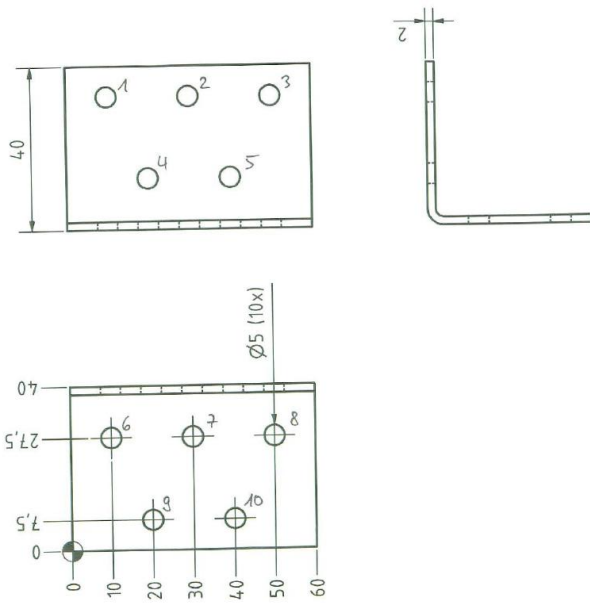


Figure A. 9 Dimensions of Angle Bracket 1211

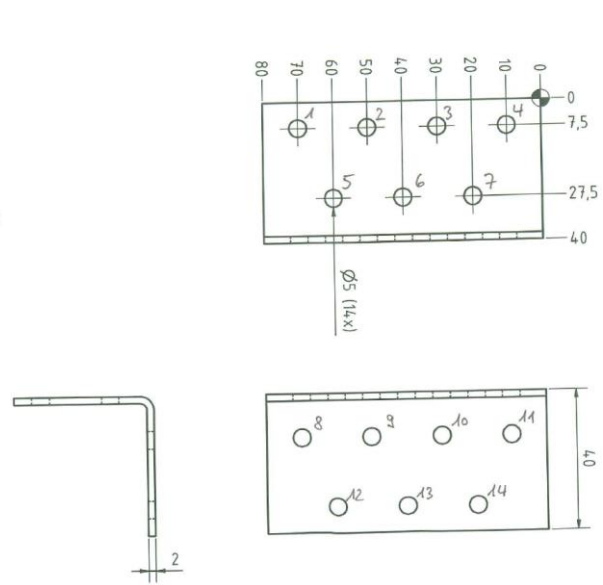


Figure A. 10 Dimensions of Angle Bracket 1212

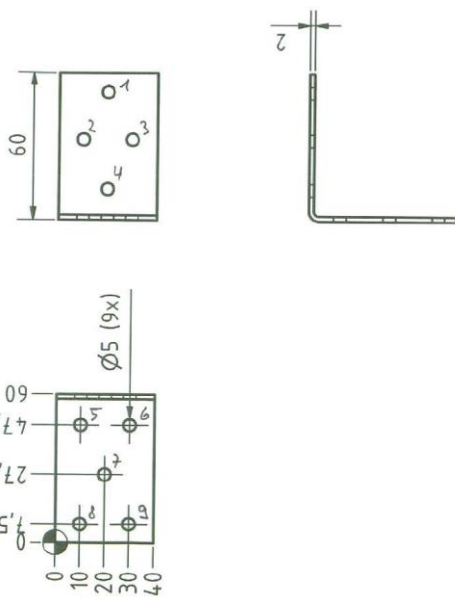


Figure A. 11 Dimensions of Angle Bracket 1213.1

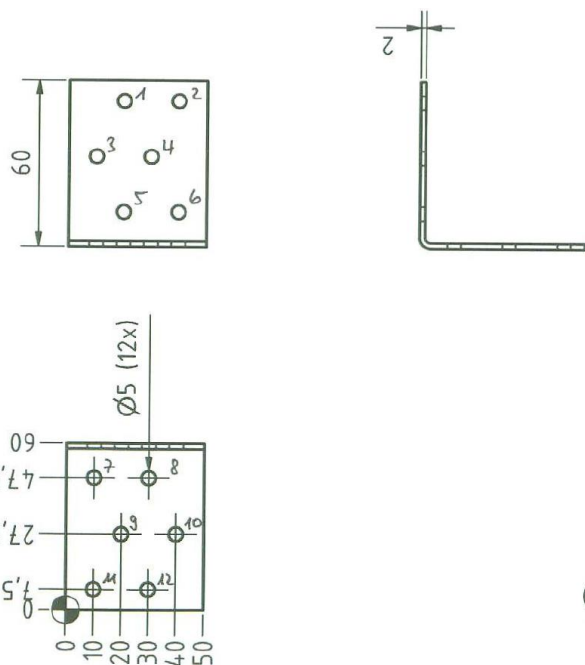


Figure A. 12 Dimensions of Angle Bracket 1210

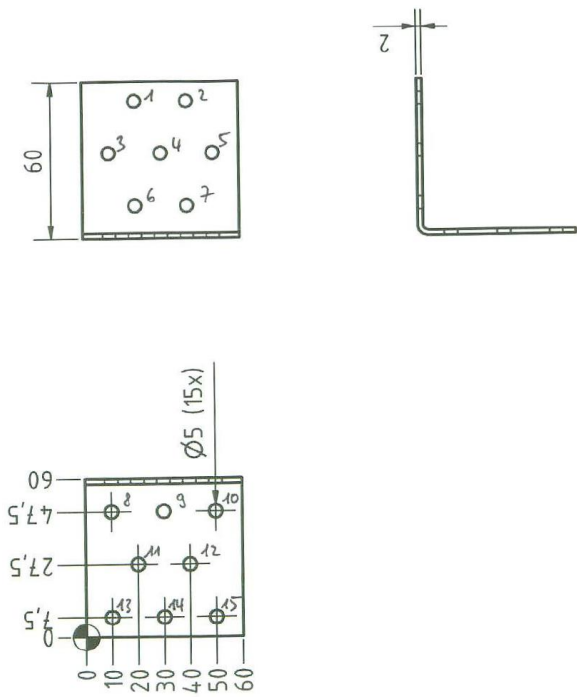


Figure A. 13 Dimensions of Angle Bracket 1215

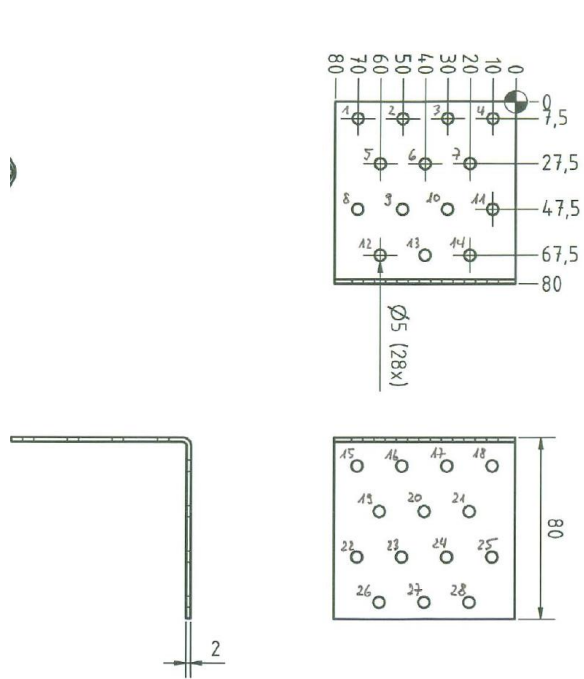


Figure A. 14 Dimensions of Angle Bracket 1219

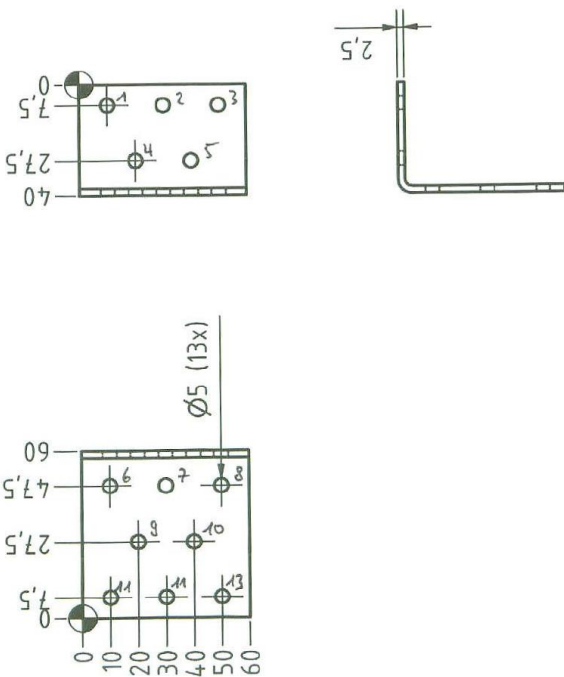


Figure A. 15 Dimensions of Angle Bracket 1220

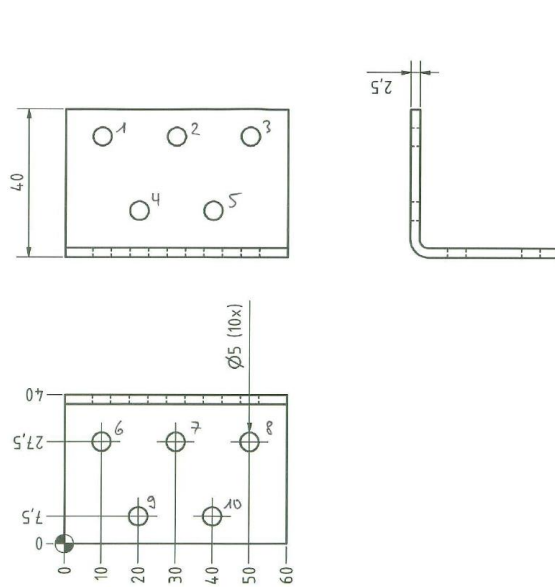


Figure A. 16 Dimensions of Angle Bracket 1221

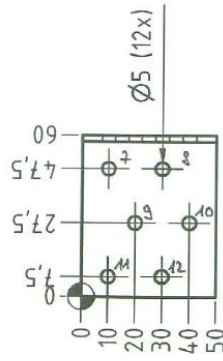
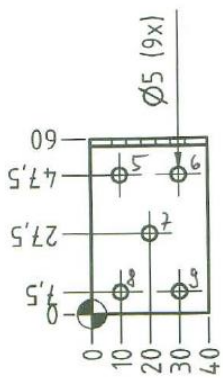
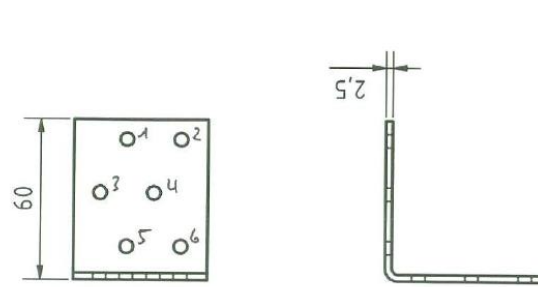
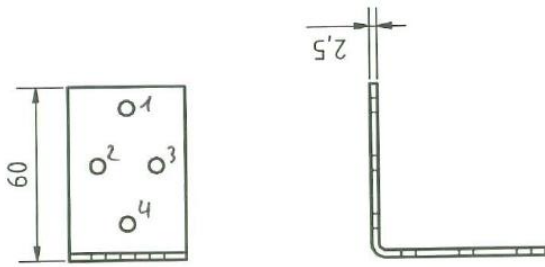


Figure A. 17 Dimensions of Angle Bracket 1222

Figure A. 18 Dimensions of Angle Bracket 1226


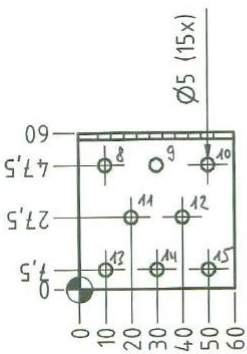
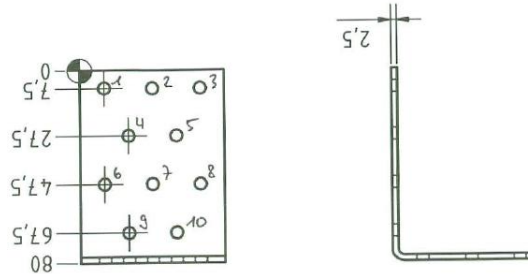
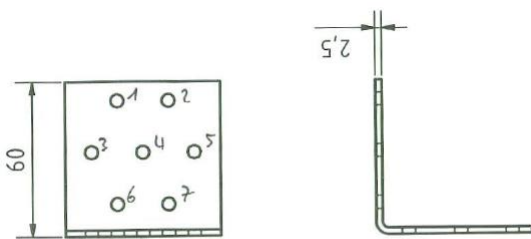


Figure A. 19 Dimensions of Angle Bracket 1227

Figure A. 20 Dimensions of Angle Bracket 1228

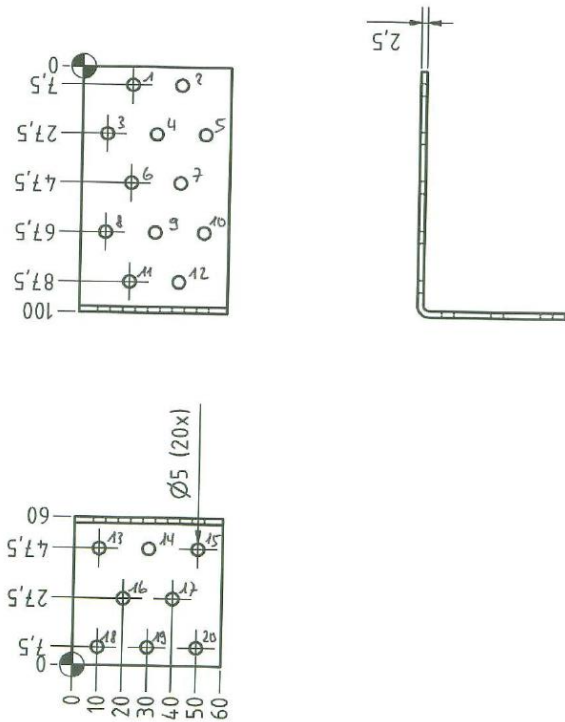


Figure A. 21 Dimensions of Angle Bracket 1229

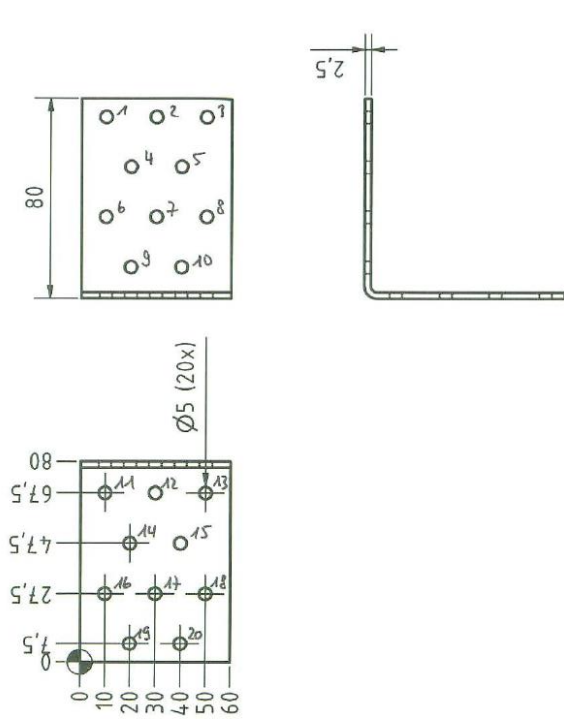


Figure A. 22 Dimensions of Angle Bracket 1230

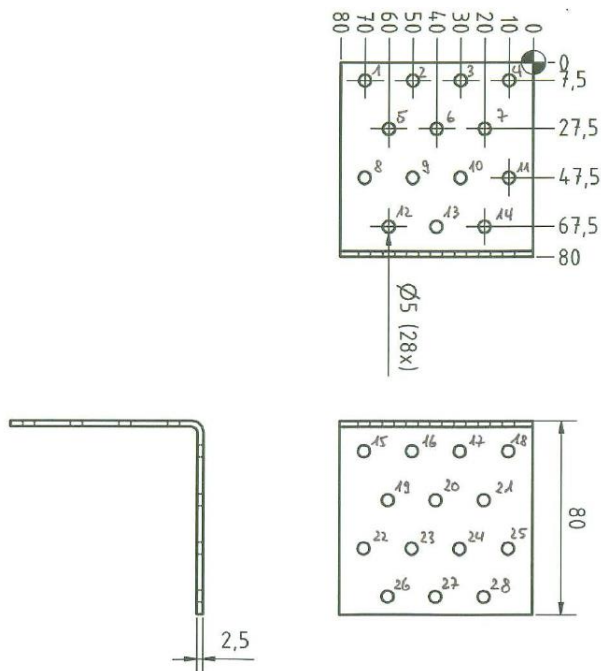


Figure A. 23 Dimensions of Angle Bracket 1231

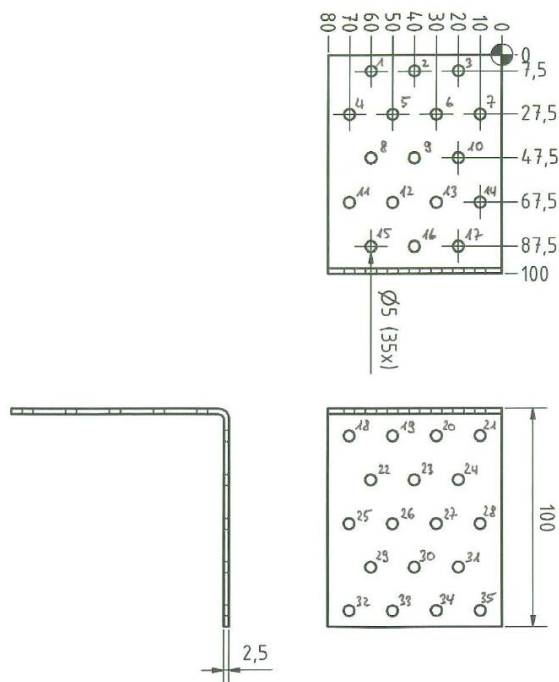


Figure A. 24 Dimensions of Angle Bracket 1232




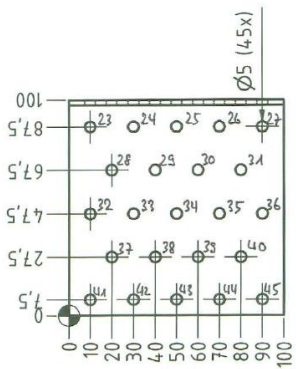
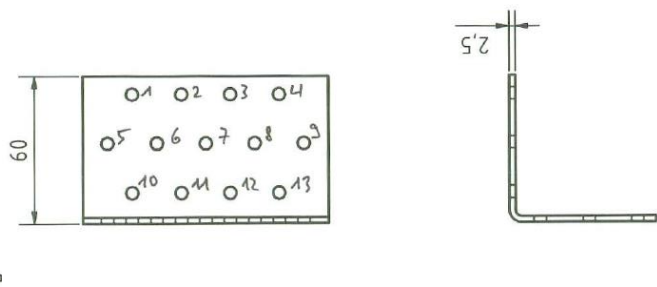
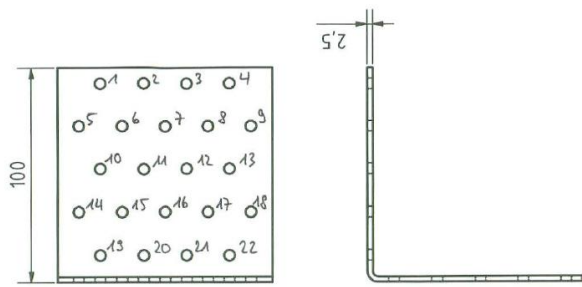


Figure A. 25 Dimensions of Angle Bracket 1233

Figure A. 26 Dimensions of Angle Bracket 1234

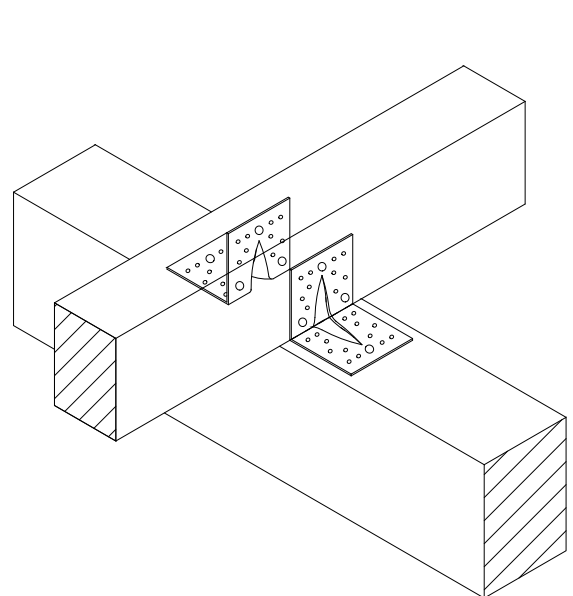
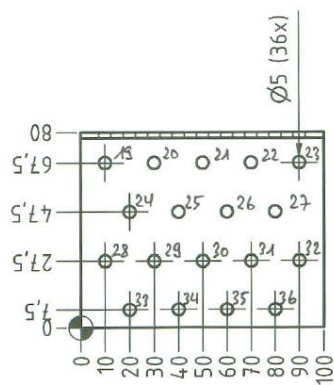
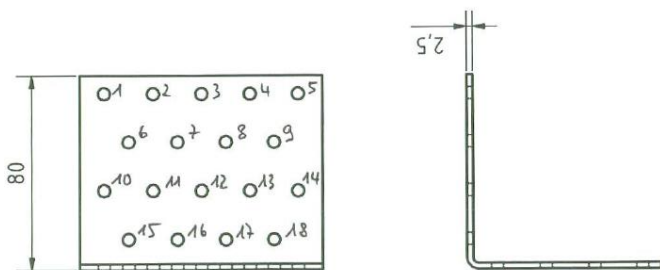


Figure A. 27 Dimensions of Angle Bracket 1235

Figure A. 28 Typical installation


**Nail Patterns – Angle Bracket 1130**

**LC 1 – column**

Nails in hole number:

- / Art. Nr.: 1130  
 - 50x50x35x2,5

LF1




**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:

1,2 /  
 6,7,9,10

LF2




**Nail Patterns – Angle Bracket 1134**

**LC 1 – column**

Nails in hole number:

1,2,3 /  
 12,13,17,18,19 Art. Nr.: 1134  
 50x90x55x2,5

LF1

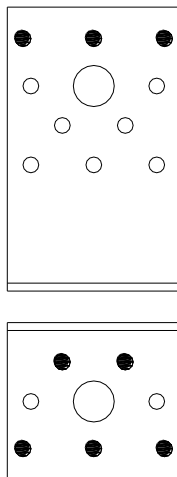


**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:

1,2,3,4,6,9,10,11 /  
 12,13,17,18,19

LF2

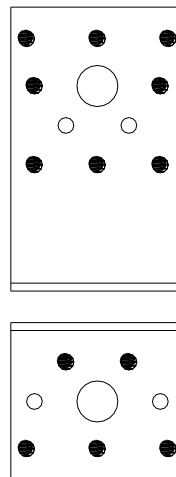

### Nail Patterns – Angle Bracket 1135

#### LC 1 – column



Nails in hole number:

1,2,4,5 /

11,12,14,15,19,20

Art. Nr.: 1135  
90x90x40x3,0

LF1





#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:

1,2,4,5,6,7 /

11,12,14,15,19,20

LF2



### Nail Patterns – Angle Bracket 1136

#### LC 1 – column



Nails in hole number:

1,2,4,5 /

11,12,14,15

Art. Nr.: 1136  
90x40x40x3,0

LF1





#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:

1,2,4,5,6,7 /

11,12,14,15

LF2



### Nail Patterns – Angle Bracket 1137

#### LC 1 – column



Nails in hole number:

1,2,4,5,6,7 /

13,14,16,17

Art. Nr.: 1137  
120x40x40x3,0

LF1





#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:

1,2,4,5,6,7,9,10 /

13,14,16,17

LF2



### Nail Patterns – Angle Bracket 1138

#### LC 1 – column



Nails in hole number:

1,2,3,4,6,7,8,9 /

15,16,18,19

Art. Nr.: 1138  
140x40x40x3,0

LF1





#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:

1,2,3,4,6,7,8,9,10,11 /

15,16,18,19

LF2




**Nail Patterns – Angle Bracket 1139**

**LC 1 – column**

Nails in hole number:  
1,2,3,4,6,7,8,9,10,11 /  
15,16,18,19

Art. Nr.: 1139  
160x40x40x3,0


LF1



**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:  
1,2,3,4,6,7,8,9,10,11,13,14 /  
15,16,18,19

LF2




**Nail Patterns – Angle Bracket 1210**

**LC 1 – column**

Nails in hole number:  
- /  
-

Art. Nr.: 1210  
40x40x40x2,0


LF1



**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:  
1,2 /  
4,5,6

LF2



**Nail Patterns – Angle Bracket 1211**


**LC 1 – column**

Nails in hole number:

- /  
-

Art. Nr.: 1211  
40x40x60x2,0

LF1

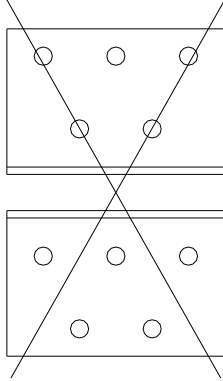


**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:

1,2,3 /  
6,7,8,9,10

LF2



**Nail Patterns – Angle Bracket 1212**


**LC 1 – column**

Nails in hole number:

- /  
-

Art. Nr.: 1212  
40x40x80x2,0

LF1

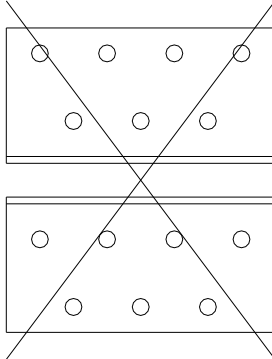


**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:

1,2,3,4 /  
8,9,10,11,12,13,14

LF2



### Nail Patterns – Angle Bracket 1213.1

#### LC 1 – column


Nails in hole number:

- /

-

Art. Nr.: 1213.1  
60x60x40x2,0

LF1





#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:

1,2,3 /

5,6,7,8,9

LF2



### Nail Patterns – Angle Bracket 1214

#### LC 1 – column


Nails in hole number:

- /

-

Art. Nr.: 1214  
60x60x50x2,0

LF1

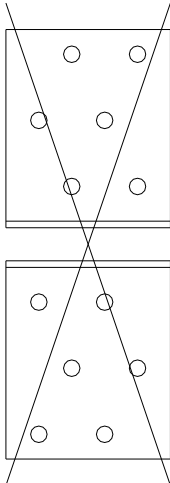



#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:

1,2,3,4 /

7,8,9,10,11,12

LF2



**Nail Patterns – Angle Bracket 1215**


**LC 1 – column**

Nails in hole number:

- /

-

Art. Nr.: 1215  
60x60x60x2,0  
LF1

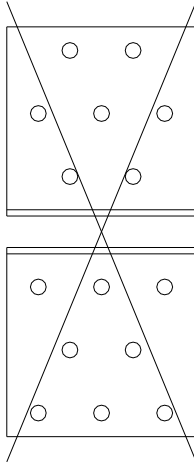


**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:

1,2,3,4,5 /

8,9,10,11,12,13,14,15

LF2

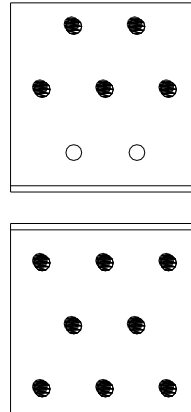

**Nail Patterns – Angle Bracket 1219**


**LC 1 – column**

Nails in hole number:

1,2,3,4 /

15,16,17,18,19,20,21,22,23,24,25,26,27,28

Art. Nr.: 1219  
80x80x80x2,0  
LF1

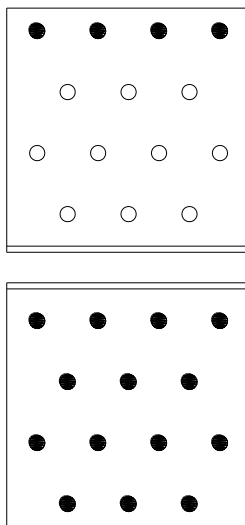


**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:

1,2,3,4,5,6,7,8,9,10,11 /

15,16,17,18,19,20,21,22,23,24,  
25,26,27,28

LF2

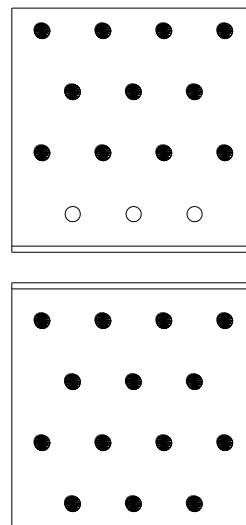




### Nail Patterns – Angle Bracket 1220

#### LC 1 – column

Nails in hole number:


- /
- Art. Nr.: 1220  
40x60x60x2,5  
LF1

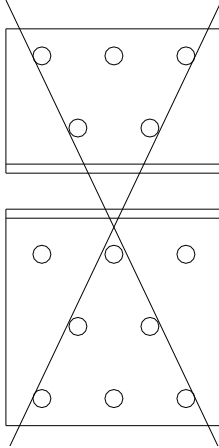

#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:

- 1,2,3 /
- 6,7,8,9,10,11,12,13  
LF2

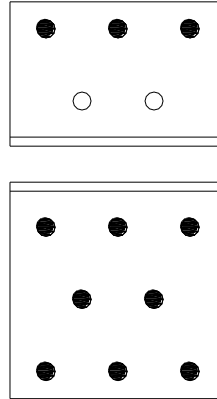


### Nail Patterns – Angle Bracket 1221

#### LC 1 – column

Nails in hole number:


- /
- Art. Nr.: 1221  
40x40x60x2,5  
LF1

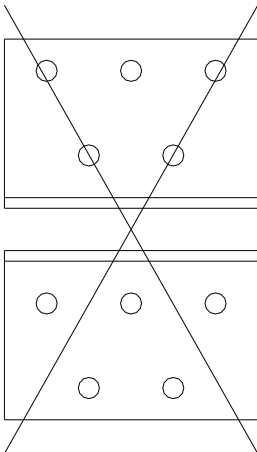

#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:

- 1,2,3 /
- 6,7,8,9,10  
LF2

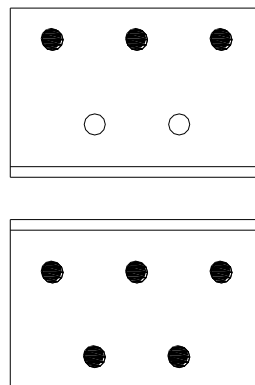


### Nail Patterns – Angle Bracket 1222

#### LC 1 – column

Nails in hole number:

- /  
- Art. Nr.: 1222  
60x60x40x2,5

LF1

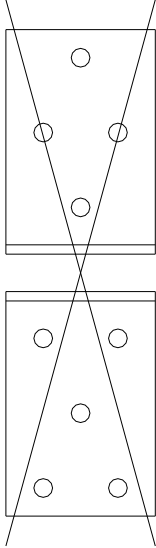


#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:

1,2,3 /  
5,6,7,8,9

LF2

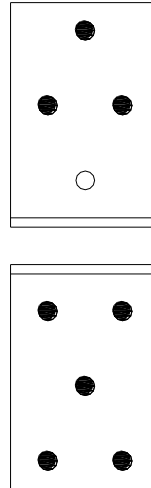


### Nail Patterns – Angle Bracket 1226

#### LC 1 – column

Nails in hole number:

- /  
- Art. Nr.: 1226  
60x60x50x2,5

LF1

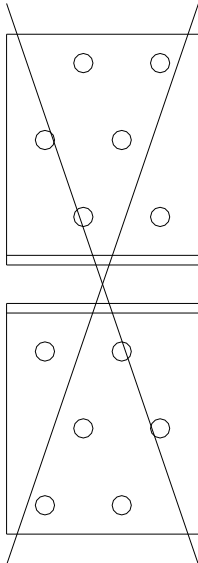


#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:

1,2,3,4 /  
7,8,9,10,11,12

LF2

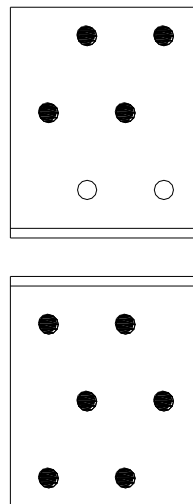

**Nail Patterns – Angle Bracket 1227**

**LC 1 – column**


Nails in hole number:

- /

-

Art. Nr.: 1227  
60x60x60x2,5

LF1

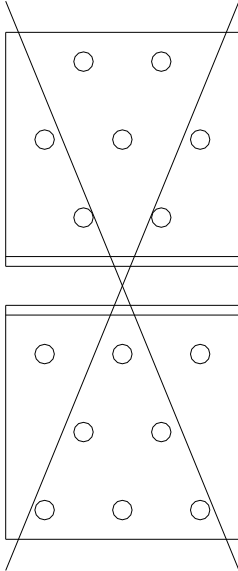


**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:

1,2,3,4,5 /

8,9,10,11,12,13,14,15

LF2

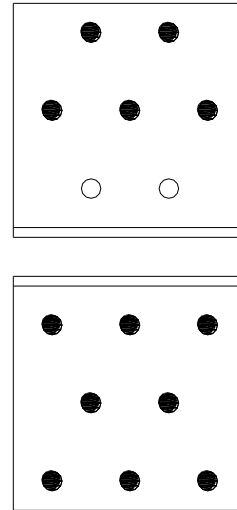

**Nail Patterns – Angle Bracket 1228**

**LC 1 – column**


Nails in hole number:

1,2,3 /

11,12,13,14,15,16,17,18

Art. Nr.: 1228  
60x80x60x2,5

LF1

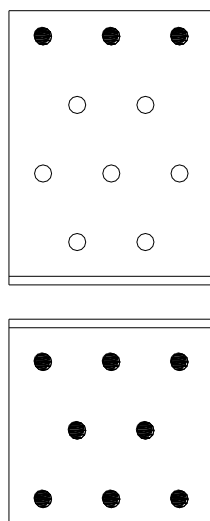


**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:

1,2,3,4,5,6,7,8 /

11,12,13,14,15,16,17,18

LF2


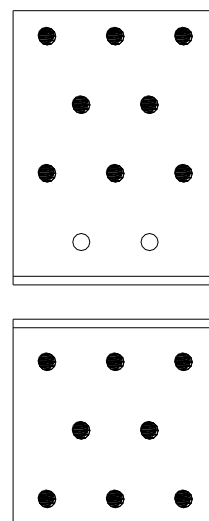


**Nail Patterns – Angle Bracket 1229**

**LC 1 – column**

Nails in hole number:  
1,2,3,4,5 /  
13,14,15,16,17,18,19,20



Art. Nr.: 1229  
60x100x60x2,5  
LF1



**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:  
1,2,3,4,5,6,7,8,9,10 /  
13,14,15,16,17,18,19,20

LF2





**Nail Patterns – Angle Bracket 1230**

**LC 1 – column**

Nails in hole number:  
1,2,3 /  
11,12,13,14,15,16,17,18,19,20



Art. Nr.: 1230  
80x80x60x2,5  
LF1



**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:  
1,2,3,4,5,6,7,8 /  
11,12,13,14,15,16,17,18,19,20

LF2



**Nail Patterns – Angle Bracket 1231**

**LC 1 – column**



Nails in hole number:

1,2,3,4 /

15,16,17,18,19,20,21,22,23,24,25,26,27,28

Art. Nr.: 1231  
80x80x80x2,5

LF1



**LC 1 – purlin, LC 2/3, LC 4/5**



Nails in hole number:

1,2,3,4,5,6,7,8,9,10,11 /

15,16,17,18,19,20,21,22,23,

24,25,26,27,28

LF2



**Nail Patterns – Angle Bracket 1232**

**LC 1 – column**



Nails in hole number:

1,2,3,4,5,6,7 /

18,19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35

Art. Nr.: 1232  
100x100x80x2,5

LF1



**LC 1 – purlin, LC 2/3, LC 4/5**



Nails in hole number:

1,2,3,4,5,6,7,8,9,10,11,12,13,14 /

18,19,20,21,22,23,24,25,26,

27,28,29,30,31,32,33,34,35

LF2





**Nail Patterns – Angle Bracket 1233**

**LC 1 – column**

Nails in hole number:

1,2,3,4,5,6,7,8,9 /  
23,24,25,26,27,28,29,30,31,32,33,34,  
35,36,37,38,39,40,41,42,43,44,45

Art. Nr.: 1233  
100x100x100x2,5  
LF1





**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:

1,2,3,4,5,6,7,8,9,10,11,12,13,  
14,15,16,17,18 /  
23,24,25,26,27,28,29,30,31,32,33,34,  
35,36,37,38,39,40,41,42,43,44,45

LF2



**Nail Patterns – Angle Bracket 1234**



**LC 1 – column**

Nails in hole number:

- /  
-

Art. Nr.: 1234  
60x60x100x2,5

LF1





**LC 1 – purlin, LC 2/3, LC 4/5**

Nails in hole number:

1,2,3,4,5,6,7,8,9 /  
14,15,16,17,18,19,20,21,22,  
23,24,25,26,27

LF2





### Nail Patterns – Angle Bracket 1235

#### LC 1 – column

Nails in hole number:  
1,2,3,4,5 /  
19,20,21,22,23,24,25,26,27,  
28,29,30,31,32,33,34,35,36

Art. Nr.: 1235  
80x80x100x2,5



LF1



#### LC 1 – purlin, LC 2/3, LC 4/5

Nails in hole number:  
1,2,3,4,5,6,7,8,9,10,11,12,13,14 /  
19,20,21,22,23,24,25,26,27,  
28,29,30,31,32,33,34,35,36

LF2




## Annex B

### Characteristic load-carrying capacities

#### Definitions of forces, their directions and eccentricity

##### Forces - Beam to beam connection

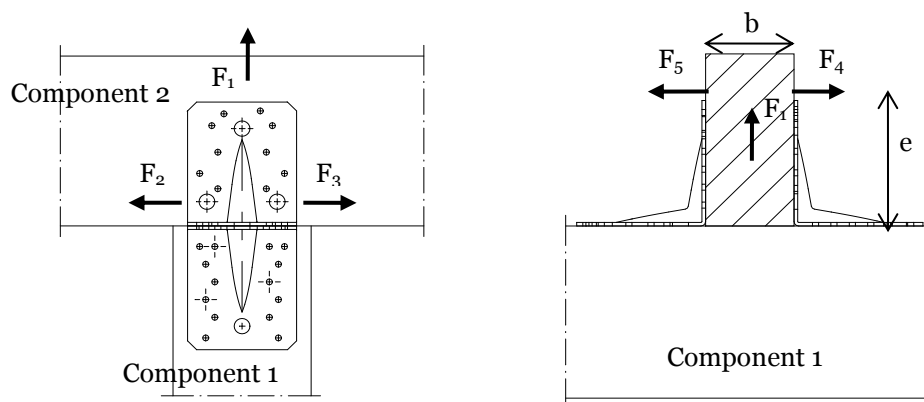

#### Fastener specification

Holes are marked with numbers referring to the nailing pattern in Annex A.

#### Double angle brackets per connection

The angle brackets must be placed at each side opposite to each other, symmetrically to the component axis.

#### Acting forces

- $F_1$  Lifting force acting along the central axis of the joint.
- $F_2$  and  $F_3$  Lateral force acting in the joint between the component 2 and component 1 in the component 2 direction
- $F_4$  and  $F_5$  Lateral force acting in the component 1 direction along the central axis of the joint. If the load is applied with an eccentricity  $e$ , a design for combined loading is required.

#### Single angle bracket per connection

##### Acting forces

- $F_1$  Lifting force acting in the central axis of the angle bracket. The component 2 shall be prevented from rotation. If the component 2 is prevented from rotation the load-carrying capacity will be half of a connection with double angle brackets.
- $F_2$  and  $F_3$  Lateral force acting in the joint between the component 2 and the component 1 in the component 2 direction. The component 2 shall be prevented from rotation. If the component 2 is prevented from rotation the load-carrying capacity will be half of a connection with double angle brackets.
- $F_4$  and  $F_5$  Lateral force acting in the component 1 direction in the height of the top edge of component 2.  $F_4$  is the lateral force towards the angle bracket;  $F_5$  is the lateral force away from the angle bracket. Only the characteristic load-carrying capacities for angle brackets with ribs are given.

#### Wane

Wane is not allowed, the timber has to be sharp-edged in the area of the angle brackets.

#### Timber splitting

For the lifting force  $F_1$  it must be checked in accordance with Eurocode 5 or a similar national Timber Code that splitting will not occur.



**Connection to concrete or steel with a bolt or metal anchor**


The tensile load  $F_{B,Ed}$  for the design of a bolt or metal anchor is calculated as:

$$F_{B,Ed} = F_{1,d} \cdot \left( 1 + \frac{e_B}{z} \right)$$

Where:

$e_B$  Eccentricity of the bolt with regard to the force  $F_1$

$z$  Distance between the bolt and the end of the horizontal flap of the angle bracket

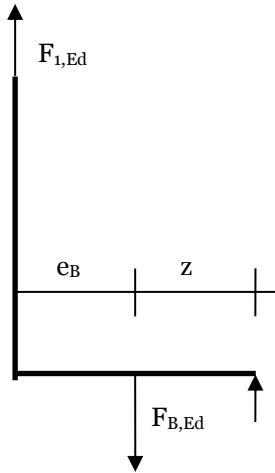**Combined forces**

If the forces  $F_1$  and  $F_2/F_3$  or  $F_4/F_5$  act at the same time, the following inequality shall be fulfilled:

$$\left( \frac{F_{1,d}}{F_{Rd,1}} \right)^2 + \left( \frac{F_{2,d}}{F_{Rd,2}} \right)^2 + \left( \frac{F_{3,d}}{F_{Rd,3}} \right)^2 + \left( \frac{F_{4,d}}{F_{Rd,4}} \right)^2 + \left( \frac{F_{5,d}}{F_{Rd,5}} \right)^2 \leq 1$$

The forces  $F_2$  and  $F_3$  or  $F_4$  and  $F_5$  are forces with opposite direction. Therefore only one force  $F_2$  or  $F_3$ , and  $F_4$  or  $F_5$ , respectively, is able to act simultaneously with  $F_1$ , while the other shall be set to zero.

If the load  $F_4/F_5$  is applied with an eccentricity  $e$ , a design for combined loading **for connections with double angle brackets** is required. Here, an additional force  $\Delta F_1$  has to be added to the existing force  $F_1$ .

$$\Delta F_{1,d} = F_{4,d} / F_{5,d} \cdot \frac{e}{B}$$

$B$  is the width of component 2.

**Table B.1:** Force  $F_1$  Column, 2 angle brackets / connection

Bracket number	Bracket type	Nail number $n_V$	Nail number $n_H$	$F_{1,Rk}$ [kN] (column)	
				Timber	Steel
1130	50 x 50 x 35	-	-	-	-
1134	50 x 90 x 55	1,2,3	12,13,17,18,19	2,19	3,32
1135	90 x 90 x 40	1,2,4,5	11,12,14,15,19,20	2,41	2,28
1136	90 x 40 x 40	1,2,4,5	11,12,14,15	1,85	2,75
1137	120 x 40 x 40	1,2,4,5,6,7	13,14,16,17	1,85	2,75
1138	140 x 40 x 40	1,2,3,4,6,7,8,9	15,16,18,19	1,85	2,75
1139	160 x 40 x 40	1,2,3,4,6,7,8,9,10,11	15,16,18,19	1,85	2,75
1210	40 x 40 x 40	-	-	-	-
1211	40 x 40 x 60	-	-	-	-
1212	40 x 40 x 80	-	-	-	-
1213.1	60 x 60 x 40	-	-	-	-
1214	60 x 60 x 50	-	-	-	-
1215	60 x 60 x 60	-	-	-	-
1219	80 x 80 x 80	1,2,3,4	15,16,17,18,19,20,21,22,23,24,25,26,27,28	5,06	2,83
1220	40 x 60 x 60	-	-	-	-
1221	40 x 40 x 60	-	-	-	-
1222	60 x 60 x 40	-	-	-	-
1226	60 x 60 x 50	-	-	-	-
1227	60 x 60 x 60	-	-	-	-
1228	60 x 80 x 60	1,2,3	11,12,13,14,15,16,17,18	3,52	3,32
1229	60 x 100 x 60	1,2,3,4,5	13,14,15,16,17,18,19,20	3,52	3,32
1230	80 x 80 x 60	1,2,3	11,12,13,14,15,16,17,18,19,20	3,80	3,32
1231	80 x 80 x 80	1,2,3,4	15,16,17,18,19,20,21,22,23,24,25,26,27,28	5,06	4,43
1232	100 x 100 x 80	1,2,3,4,5,6,7	18,19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35	5,28	4,43
1233	100 x 100 x 100	1,2,3,4,5,6,7,8,9	23,24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45	6,60	5,53
1234	60 x 60 x 100	-	-	-	-
1235	80 x 80 x 100	1,2,3,4,5	19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35,36	6,33	5,53

**Table B.2:** Force  $F_1$  Column, 1 angle bracket / connection

Bracket number	Bracket type	Nail number $n_V$	Nail number $n_H$	$F_{1,Rk}$ [kN] (column)	
				Timber	Steel
1130	50 x 50 x 35	-	-	-	-
1134	50 x 90 x 55	1,2,3	12,13,17,18,19	1,10	1,66
1135	90 x 90 x 40	1,2,4,5	11,12,14,15,19,20	1,21	1,14
1136	90 x 40 x 40	1,2,4,5	11,12,14,15	0,92	1,37
1137	120 x 40 x 40	1,2,4,5,6,7	13,14,16,17	0,92	1,37
1138	140 x 40 x 40	1,2,3,4,6,7,8,9	15,16,18,19	0,92	1,37
1139	160 x 40 x 40	1,2,3,4,6,7,8,9,10,11	15,16,18,19	0,92	1,37
1210	40 x 40 x 40	-	-	-	-
1211	40 x 40 x 60	-	-	-	-
1212	40 x 40 x 80	-	-	-	-
1213.1	60 x 60 x 40	-	-	-	-
1214	60 x 60 x 50	-	-	-	-
1215	60 x 60 x 60	-	-	-	-
1219	80 x 80 x 80	1,2,3,4	15,16,17,18,19,20,21,22,23,24,25,26,27,28	2,53	1,42
1220	40 x 60 x 60	-	-	-	-
1221	40 x 40 x 60	-	-	-	-
1222	60 x 60 x 40	-	-	-	-
1226	60 x 60 x 50	-	-	-	-
1227	60 x 60 x 60	-	-	-	-
1228	60 x 80 x 60	1,2,3	11,12,13,14,15,16,17,18	1,76	1,66
1229	60 x 100 x 60	1,2,3,4,5	13,14,15,16,17,18,19,20	1,76	1,66
1230	80 x 80 x 60	1,2,3	11,12,13,14,15,16,17,18,19,20	1,90	1,66
1231	80 x 80 x 80	1,2,3,4	15,16,17,18,19,20,21,22,23,24,25,26,27,28	2,53	2,21
1232	100 x 100 x 80	1,2,3,4,5,6,7	18,19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35	2,64	2,21
1233	100 x 100 x 100	1,2,3,4,5,6,7,8,9	23,24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45	3,30	2,77
1234	60 x 60 x 100	-	-	-	-
1235	80 x 80 x 100	1,2,3,4,5	19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35,36	3,16	2,77

**Table B.3:** Force  $F_1$  Purlin, 2 angle brackets / connection

Bracket number	Bracket type	Nail number $n_V$	Nail number $n_H$	$F_{1,Rk}$ [kN] (purlin)	
				Timber	Steel
1130	50 x 50 x 35	1,2	6,7,9,10	2,19	1,84
1134	50 x 90 x 55	1,2,3,4,6,9, 10,11	12,13,17,18,19	2,19	3,32
1135	90 x 90 x 40	1,2,4,5,6,7	11,12,14,15,19,20	2,41	2,28
1136	90 x 40 x 40	1,2,4,5,6,7	11,12,14,15	1,85	2,75
1137	120 x 40 x 40	1,2,4,5,6,7,9,10	13,14,16,17	1,85	2,75
1138	140 x 40 x 40	1,2,3,4,6,7,8,9, 10,11	15,16,18,19	1,85	2,75
1139	160 x 40 x 40	1,2,3,4,6,7,8,9, 10,11,13,14	15,16,18,19	1,85	2,75
1210	40 x 40 x 40	1,2	4,5,6	1,95	1,42
1211	40 x 40 x 60	1,2,3	6,7,8,9,10	2,93	2,12
1212	40 x 40 x 80	1,2,3,4	8,9,10,11,12,13,14	3,91	2,83
1213.1	60 x 60 x 40	1,2,3	5,6,7,8,9	2,35	1,42
1214	60 x 60 x 50	1,2,3,4	7,8,9,10,11,12	2,35	1,89
1215	60 x 60 x 60	1,2,3,4,5	8,9,10,11,12,13,14,15	3,52	2,36
1219	80 x 80 x 80	1,2,3,4,5,6,7, 8,9,10,11	15,16,17,18,19,20,21,22,23,24, 25,26,27,28	5,06	2,83
1220	40 x 60 x 60	1,2,3	6,7,8,9,10,11,12,13	3,52	3,32
1221	40 x 40 x 60	1,2,3	6,7,8,9,10	2,93	3,32
1222	60 x 60 x 40	1,2,3	5,6,7,8,9	2,35	2,21
1226	60 x 60 x 50	1,2,3,4	7,8,9,10,11,12	2,35	2,95
1227	60 x 60 x 60	1,2,3,4,5	8,9,10,11,12,13,14,15	3,52	3,32
1228	60 x 80 x 60	1,2,3,4,5,6,7,8	11,12,13,14,15,16,17,18	3,52	3,32
1229	60 x 100 x 60	1,2,3,4,5,6,7, 8,9,10	13,14,15,16,17,18,19,20	3,52	3,32
1230	80 x 80 x 60	1,2,3,4,5,6,7,8	11,12,13,14,15,16,17, 18,19,20	3,80	3,32
1231	80 x 80 x 80	1,2,3,4,5,6,7,8,9,10,11	15,16,17,18,19,20,21,22, 23,24,25,26,27,28	5,06	4,43
1232	100 x 100 x 80	1,2,3,4,5,6,7,8,9,10,11, 12,13,14	18,19,20,21,22,23,24,25,26, 27,28,29,30,31,32,33,34,35	5,28	4,43
1233	100 x 100 x 100	1,2,3,4,5,6,7,8, 9,10,11,12,13, 14,15,16,17,18	23,24,25,26,27,28,29,30,31,32, 33,34,35,36,37,38,39,40,41,42, 43,44,45	6,60	5,53
1234	60 x 60 x 100	1,2,3,4,5,6, 7,8,9	14,15,16,17,18,19,20,21,22,23, 24,25,26,27	5,87	5,53
1235	80 x 80 x 100	1,2,3,4,5,6,7,8,9,10,11, 12,13,14	19,20,21,22,23,24,25,26,27, 28,29,30,31,32,33,34,35,36	6,33	5,53

**Table B.4:** Force  $F_1$  Purlin, 1 angle bracket / connection

Bracket number	Bracket type	Nail number $n_V$	Nail number $n_H$	$F_{1,Rk}$ [kN] (purlin)	
				Timber	Steel
1130	50 x 50 x 35	1,2	6,7,9,10	1,10	0,92
1134	50 x 90 x 55	1,2,3,4,6,9, 10,11	12,13,17,18,19	1,10	1,66
1135	90 x 90 x 40	1,2,4,5,6,7	11,12,14,15,19,20	1,21	1,14
1136	90 x 40 x 40	1,2,4,5,6,7	11,12,14,15	0,92	1,37
1137	120 x 40 x 40	1,2,4,5,6,7,9,10	13,14,16,17	0,92	1,37
1138	140 x 40 x 40	1,2,3,4,6,7,8,9, 10,11	15,16,18,19	0,92	1,37
1139	160 x 40 x 40	1,2,3,4,6,7,8,9, 10,11,13,14	15,16,18,19	0,92	1,37
1210	40 x 40 x 40	1,2	4,5,6	0,98	0,71
1211	40 x 40 x 60	1,2,3	6,7,8,9,10	1,46	1,06
1212	40 x 40 x 80	1,2,3,4	8,9,10,11,12,13,14	1,95	1,42
1213.1	60 x 60 x 40	1,2,3	5,6,7,8,9	1,17	0,71
1214	60 x 60 x 50	1,2,3,4	7,8,9,10,11,12	1,17	0,94
1215	60 x 60 x 60	1,2,3,4,5	8,9,10,11,12,13,14,15	1,76	1,18
1219	80 x 80 x 80	1,2,3,4,5,6,7, 8,9,10,11	15,16,17,18,19,20,21,22,23,24, 25,26,27,28	2,53	1,42
1220	40 x 60 x 60	1,2,3	6,7,8,9,10,11,12,13	1,76	1,66
1221	40 x 40 x 60	1,2,3	6,7,8,9,10	1,46	1,66
1222	60 x 60 x 40	1,2,3	5,6,7,8,9	1,17	1,11
1226	60 x 60 x 50	1,2,3,4	7,8,9,10,11,12	1,17	1,48
1227	60 x 60 x 60	1,2,3,4,5	8,9,10,11,12,13,14,15	1,76	1,66
1228	60 x 80 x 60	1,2,3,4,5,6,7,8	11,12,13,14,15,16,17,18	1,76	1,66
1229	60 x 100 x 60	1,2,3,4,5,6,7, 8,9,10	13,14,15,16,17,18,19,20	1,76	1,66
1230	80 x 80 x 60	1,2,3,4,5,6,7,8	11,12,13,14,15,16,17, 18,19,20	1,90	1,66
1231	80 x 80 x 80	1,2,3,4,5,6,7,8,9,10,11	15,16,17,18,19,20,21,22, 23,24,25,26,27,28	2,53	2,21
1232	100 x 100 x 80	1,2,3,4,5,6,7,8,9,10,11, 12,13,14	18,19,20,21,22,23,24,25,26, 27,28,29,30,31,32,33,34,35	2,64	2,21
1233	100 x 100 x 100	1,2,3,4,5,6,7,8, 9,10,11,12,13, 14,15,16,17,18	23,24,25,26,27,28,29,30,31,32, 33,34,35,36,37,38,39,40,41,42, 43,44,45	3,30	2,77
1234	60 x 60 x 100	1,2,3,4,5,6, 7,8,9	14,15,16,17,18,19,20,21,22,23, 24,25,26,27	2,93	2,77
1235	80 x 80 x 100	1,2,3,4,5,6,7,8,9,10,11, 12,13,14	19,20,21,22,23,24,25,26,27, 28,29,30,31,32,33,34,35,36	3,16	2,77

**Table B.5:** Forces  $F_{2,3}$ , 2 angle brackets / connection

Bracket number	Bracket type	Nail number $n_V$	Nail number $n_H$	$F_{2,3,Rk}$ [kN]
				Timber
1130	50 x 50 x 35	1,2	6,7,9,10	2,63
1134	50 x 90 x 55	1,2,3,4,6,9, 10,11	12,13,17,18,19	6,12
1135	90 x 90 x 40	1,2,4,5,6,7	11,12,14,15,19,20	4,80
1136	90 x 40 x 40	1,2,4,5,6,7	11,12,14,15	5,12
1137	120 x 40 x 40	1,2,4,5,6,7,9,10	13,14,16,17	5,46
1138	140 x 40 x 40	1,2,3,4,6,7,8,9, 10,11	15,16,18,19	5,46
1139	160 x 40 x 40	1,2,3,4,6,7,8,9, 10,11,13,14	15,16,18,19	5,46
1210	40 x 40 x 40	1,2	4,5,6	2,47
1211	40 x 40 x 60	1,2,3	6,7,8,9,10	5,05
1212	40 x 40 x 80	1,2,3,4	8,9,10,11,12,13,14	8,23
1213.1	60 x 60 x 40	1,2,3	5,6,7,8,9	3,03
1214	60 x 60 x 50	1,2,3,4	7,8,9,10,11,12	4,19
1215	60 x 60 x 60	1,2,3,4,5	8,9,10,11,12,13,14,15	10,0
1219	80 x 80 x 80	1,2,3,4,5,6,7, 8,9,10,11	15,16,17,18,19,20,21,22,23,24, 25,26,27,28	11,1
1220	40 x 60 x 60	1,2,3	6,7,8,9,10,11,12,13	6,29
1221	40 x 40 x 60	1,2,3	6,7,8,9,10	5,02
1222	60 x 60 x 40	1,2,3	5,6,7,8,9	3,01
1226	60 x 60 x 50	1,2,3,4	7,8,9,10,11,12	4,16
1227	60 x 60 x 60	1,2,3,4,5	8,9,10,11,12,13,14,15	6,34
1228	60 x 80 x 60	1,2,3,4,5,6,7,8	11,12,13,14,15,16,17,18	8,27
1229	60 x 100 x 60	1,2,3,4,5,6,7, 8,9,10	13,14,15,16,17,18,19,20	5,30
1230	80 x 80 x 60	1,2,3,4,5,6,7,8	11,12,13,14,15,16,17, 18,19,20	8,43
1231	80 x 80 x 80	1,2,3,4,5,6,7,8,9,10,11	15,16,17,18,19,20,21,22, 23,24,25,26,27,28	16,0
1232	100 x 100 x 80	1,2,3,4,5,6,7,8,9,10,11, 12,13,14	18,19,20,21,22,23,24,25,26, 27,28,29,30,31,32,33,34,35	15,1
1233	100 x 100 x 100	1,2,3,4,5,6,7,8, 9,10,11,12,13, 14,15,16,17,18	23,24,25,26,27,28,29,30,31,32, 33,34,35,36,37,38,39,40,41,42, 43,44,45	21,6
1234	60 x 60 x 100	1,2,3,4,5,6, 7,8,9	14,15,16,17,18,19,20,21,22,23, 24,25,26,27	15,5
1235	80 x 80 x 100	1,2,3,4,5,6,7,8,9,10,11, 12,13,14	19,20,21,22,23,24,25,26,27, 28,29,30,31,32,33,34,35,36	19,0

**Table B.6:** Forces  $F_{2,3}$ , 1 angle bracket / connection

Bracket number	Bracket type	Nail number $n_V$	Nail number $n_H$	$F_{2,3,Rk}$ [kN]
				Timber
1130	50 x 50 x 35	1,2	6,7,9,10	1,31
1134	50 x 90 x 55	1,2,3,4,6,9, 10,11	12,13,17,18,19	3,06
1135	90 x 90 x 40	1,2,4,5,6,7	11,12,14,15,19,20	2,40
1136	90 x 40 x 40	1,2,4,5,6,7	11,12,14,15	2,56
1137	120 x 40 x 40	1,2,4,5,6,7,9,10	13,14,16,17	2,73
1138	140 x 40 x 40	1,2,3,4,6,7,8,9, 10,11	15,16,18,19	2,73
1139	160 x 40 x 40	1,2,3,4,6,7,8,9, 10,11,13,14	15,16,18,19	2,73
1210	40 x 40 x 40	1,2	4,5,6	1,24
1211	40 x 40 x 60	1,2,3	6,7,8,9,10	2,52
1212	40 x 40 x 80	1,2,3,4	8,9,10,11,12,13,14	4,11
1213.1	60 x 60 x 40	1,2,3	5,6,7,8,9	1,52
1214	60 x 60 x 50	1,2,3,4	7,8,9,10,11,12	2,09
1215	60 x 60 x 60	1,2,3,4,5	8,9,10,11,12,13,14,15	5,02
1219	80 x 80 x 80	1,2,3,4,5,6,7, 8,9,10,11	15,16,17,18,19,20,21,22,23,24, 25,26,27,28	5,54
1220	40 x 60 x 60	1,2,3	6,7,8,9,10,11,12,13	3,14
1221	40 x 40 x 60	1,2,3	6,7,8,9,10	2,51
1222	60 x 60 x 40	1,2,3	5,6,7,8,9	1,51
1226	60 x 60 x 50	1,2,3,4	7,8,9,10,11,12	2,08
1227	60 x 60 x 60	1,2,3,4,5	8,9,10,11,12,13,14,15	3,17
1228	60 x 80 x 60	1,2,3,4,5,6,7,8	11,12,13,14,15,16,17,18	4,14
1229	60 x 100 x 60	1,2,3,4,5,6,7, 8,9,10	13,14,15,16,17,18,19,20	2,65
1230	80 x 80 x 60	1,2,3,4,5,6,7,8	11,12,13,14,15,16,17, 18,19,20	4,22
1231	80 x 80 x 80	1,2,3,4,5,6,7,8,9,10,11	15,16,17,18,19,20,21,22, 23,24,25,26,27,28	7,98
1232	100 x 100 x 80	1,2,3,4,5,6,7,8,9,10,11, 12,13,14	18,19,20,21,22,23,24,25,26, 27,28,29,30,31,32,33,34,35	7,58
1233	100 x 100 x 100	1,2,3,4,5,6,7,8, 9,10,11,12,13, 14,15,16,17,18	23,24,25,26,27,28,29,30,31,32, 33,34,35,36,37,38,39,40,41,42, 43,44,45	10,82
1234	60 x 60 x 100	1,2,3,4,5,6, 7,8,9	14,15,16,17,18,19,20,21,22,23, 24,25,26,27	7,76
1235	80 x 80 x 100	1,2,3,4,5,6,7,8,9,10,11, 12,13,14	19,20,21,22,23,24,25,26,27, 28,29,30,31,32,33,34,35,36	9,49

**Table B.7:** Basic Forces  $F_{4,5}$ , 2 angle brackets / connection

Bracket number	Bracket type	Nail number $n_V$	Nail number $n_H$	$F_{4,5,Rk}$ [kN]	
				Timber	Steel
1130	50 x 50 x 35	1,2	6,7,9,10	6,99	2,00
1134	50 x 90 x 55	1,2,3,4,6,9,10,11	12,13,17,18,19	8,27	5,40
1135	90 x 90 x 40	1,2,4,5,6,7	11,12,14,15,19,20	6,27	3,64
1136	90 x 40 x 40	1,2,4,5,6,7	11,12,14,15	5,13	4,28
1137	120 x 40 x 40	1,2,4,5,6,7,9,10	13,14,16,17	6,32	4,28
1138	140 x 40 x 40	1,2,3,4,6,7,8,9,10,11	15,16,18,19	5,83	4,15
1139	160 x 40 x 40	1,2,3,4,6,7,8,9,10,11,13,14	15,16,18,19	6,48	4,79
1210	40 x 40 x 40	1,2	4,5,6	5,45	2,02
1211	40 x 40 x 60	1,2,3	6,7,8,9,10	9,70	3,03
1212	40 x 40 x 80	1,2,3,4	8,9,10,11,12,13,14	13,58	4,04
1213.1	60 x 60 x 40	1,2,3	5,6,7,8,9	5,23	2,21
1214	60 x 60 x 50	1,2,3,4	7,8,9,10,11,12	5,85	2,74
1215	60 x 60 x 60	1,2,3,4,5	8,9,10,11,12,13,14,15	7,96	3,31
1219	80 x 80 x 80	1,2,3,4,5,6,7,8,9,10,11	15,16,17,18,19,20,21,22,23,24,25,26,27,28	11,5	4,40
1220	40 x 60 x 60	1,2,3	6,7,8,9,10,11,12,13	10,6	3,51
1221	40 x 40 x 60	1,2,3	6,7,8,9,10	7,82	4,06
1222	60 x 60 x 40	1,2,3	5,6,7,8,9	5,09	2,83
1226	60 x 60 x 50	1,2,3,4	7,8,9,10,11,12	5,73	3,61
1227	60 x 60 x 60	1,2,3,4,5	8,9,10,11,12,13,14,15	7,75	4,29
1228	60 x 80 x 60	1,2,3,4,5,6,7,8	11,12,13,14,15,16,17,18	7,76	4,64
1229	60 x 100 x 60	1,2,3,4,5,6,7,8,9,10	13,14,15,16,17,18,19,20	8,13	4,63
1230	80 x 80 x 60	1,2,3,4,5,6,7,8	11,12,13,14,15,16,17,18,19,20	8,04	4,58
1231	80 x 80 x 80	1,2,3,4,5,6,7,8,9,10,11	15,16,17,18,19,20,21,22,23,24,25,26,27,28	10,8	6,08
1232	100 x 100 x 80	1,2,3,4,5,6,7,8,9,10,11,12,13,14	18,19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35	11,8	5,99
1233	100 x 100 x 100	1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18	23,24,25,26,27,28,29,30,31,32,33,34,35,36,37,38,39,40,41,42,43,44,45	14,8	7,48
1234	60 x 60 x 100	1,2,3,4,5,6,7,8,9	14,15,16,17,18,19,20,21,22,23,24,25,26,27	13,1	7,20
1235	80 x 80 x 100	1,2,3,4,5,6,7,8,9,10,11,12,13,14	19,20,21,22,23,24,25,26,27,28,29,30,31,32,33,34,35,36	13,7	7,59